



REV	DATE	CHANGE BEFORE	CHANGES	DRAW
Δ	02.12.10			

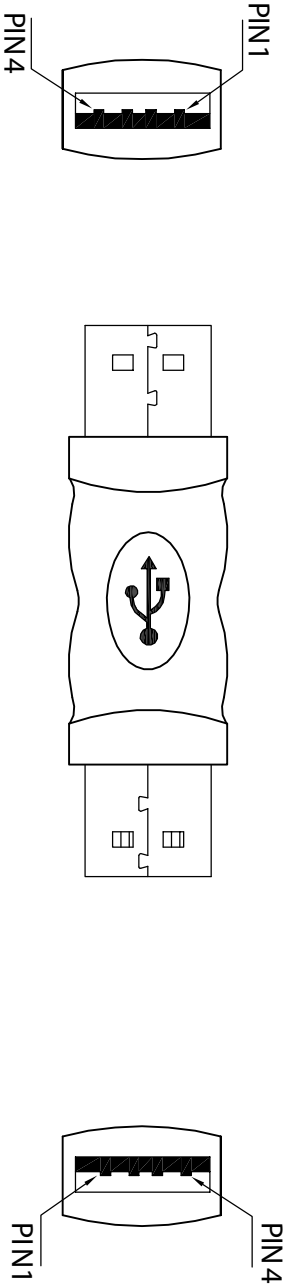

Conn. 1 USB2. 0 A Type Male

Conn. 2 USB2. 0 A Type Male

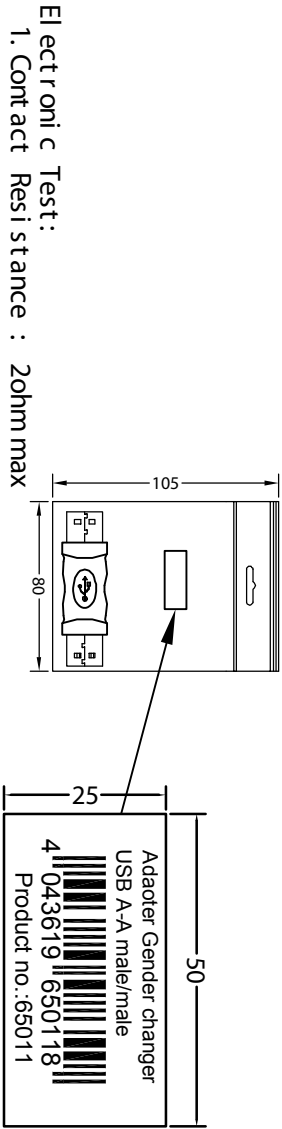

- Electronic Test:
1. Contact Resistance : 2ohm max
 2. Insulation Resistance : 10M ohm min
 3. Hi - Pot : 300V DC/10ms
 4. All Materials With RoHS Standard
 5. 100% test when it is open and short

3	OUTSIDE MOLDING	50P PVC COLOR: Black	9	15
2	CONNECTOR	USB" A" male Solder Type Pin Gold Plated Insulation White Shell NICKEL Plated	pcs	2
1	CABLE	30 AWG L=32mm	pcs	5
NO.	NAME	DESCRIPTION	UNIT	QTY

Pin Assignment	Conn.1	Conn.2
1	VBUS	
2	D-	
3	D+	
4	GND	
Shell	Shield	

Item no. **65011**
 Barcode: 4043619650118
 File: 460