

# NOTE:

- (1). Cable Spec: UL2725 28AWG (7/0.12mmCu)\*1P+24AWG (7/0.20mmCu)\*2C+ D(7/0.12CU) +Al-foil+B[16\*3 (0.12) ALMG]

Jacket Material:PVC OD:4.5±0.2mm

Cable Colour: Black

Cable Printing: USB 2.0 CABLE FULLY RATED

- (2). Connector A: USB 2.0 A Male Solder Type

INSULATION:Black

CONTACTS:Phosphor Bronze,Gold Plated

SHELL:Brass,Nickel Plated

- (3). Connector B: MINI 5PIN Male Solder Type

INSULATION:Black

CONTACTS:Phosphor Bronze,Gold Plated

SHELL:Brass,Nickel Plated

- (4).Over Molding colour: PVC-45P-Black

- (5).Parameter Settings: CT-8681FA

1. Conductive Resistance:2.5Ω

2. Insulative Resistance:5MΩ (Min.)

3. 250V/AC, DC ,1.5mA/I ,50Hz ,0.03s

- (6).Packing: POLYBAG Packing

SIDE:A


USB AM

SIDE:B

MINI 5PM

1	RED	1
2	GREEN	2
3	WHITE	3
4	BLACK	5
SHELL	DRAIN	SHELL

PIN OUT: (5)

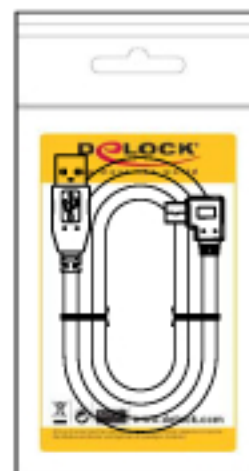

PACKING: (6)

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

LENGTH: X. ±1  
.X ±0.2  
.XX ±0.10  
ANGLE: X°. ±1°  
.X° ±0° 30'

82684

UNIT:mm		REV:0/A		NAME		USB 2.0 AM/MINI 5PM	
DRAWING	OYF	2010/06/25	S. P. NO.			DWG. NO.	
CHECK			P. O. NO.			PAGE	1/1
APPROVE			SIZE				

0

2010/06/25

REV

DESCRIPTION

DATE