
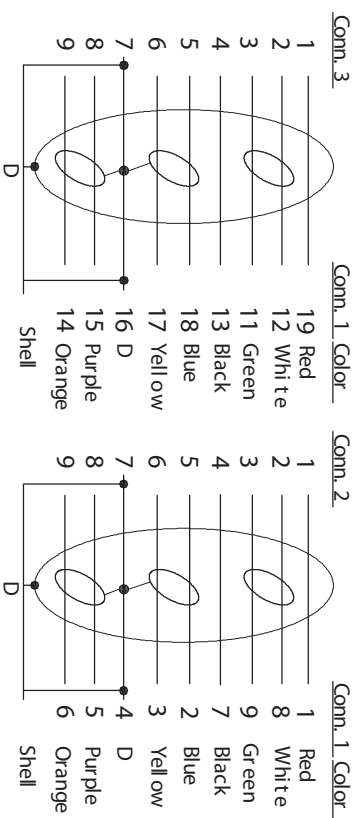



### Electrical Properties:

1. Contact Resistance: 2ohm max
2. Insulation Resistance: 10Mega ohm;
3. HI-POT: 300V DC/10ms.
4. All Materials Are With Roths Standard.
5. 100% test when it is open and short

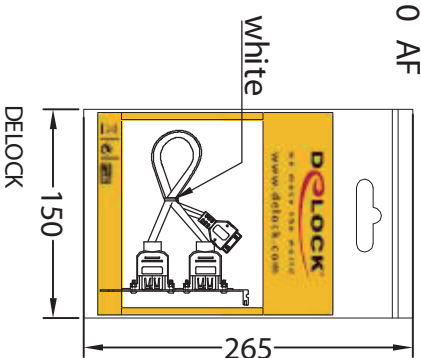

No.	Part Name	Quantity
1	CABLE US53. 0 2027(6.30AWG *1P+D+L/MY) *2C+1P= 30AWG+24AWG*2C+AL+HD-OD:4.8 Jacket Color: Black	mm 600*2
2	CONNECTOR US53. 0 ("A") Female Solder Type Insulation Color: Blue Pin Gold Plated Shell Nickel Plated	pcs 2
3	CONNECTOR 20P HOUSING (key 20P) PH=2.0mm Color: Blue	set 1
4	OUTER MOLD 50P PVC COLOR: Black	g 9 20
5	INNER MOLD LD PE	g 9 10
6	BACKET USB A/F TWO HOLE STRENGTH	pcs 1
7	SCREW M3. 0*P. 5*8MM	set 4

Note: Slot bracket USB 3.0 xz externally 1x pin header internally	
Dat	2011 / 08 / 16
Unit	mm
Projection	
Rev	A
File No.	82963
Barcode	4043619829637
	87740



we move the world

Title: Slot bracket USB 3.0 2x externally  
1x pin header internally

82963

4043619829637 e

87