


A

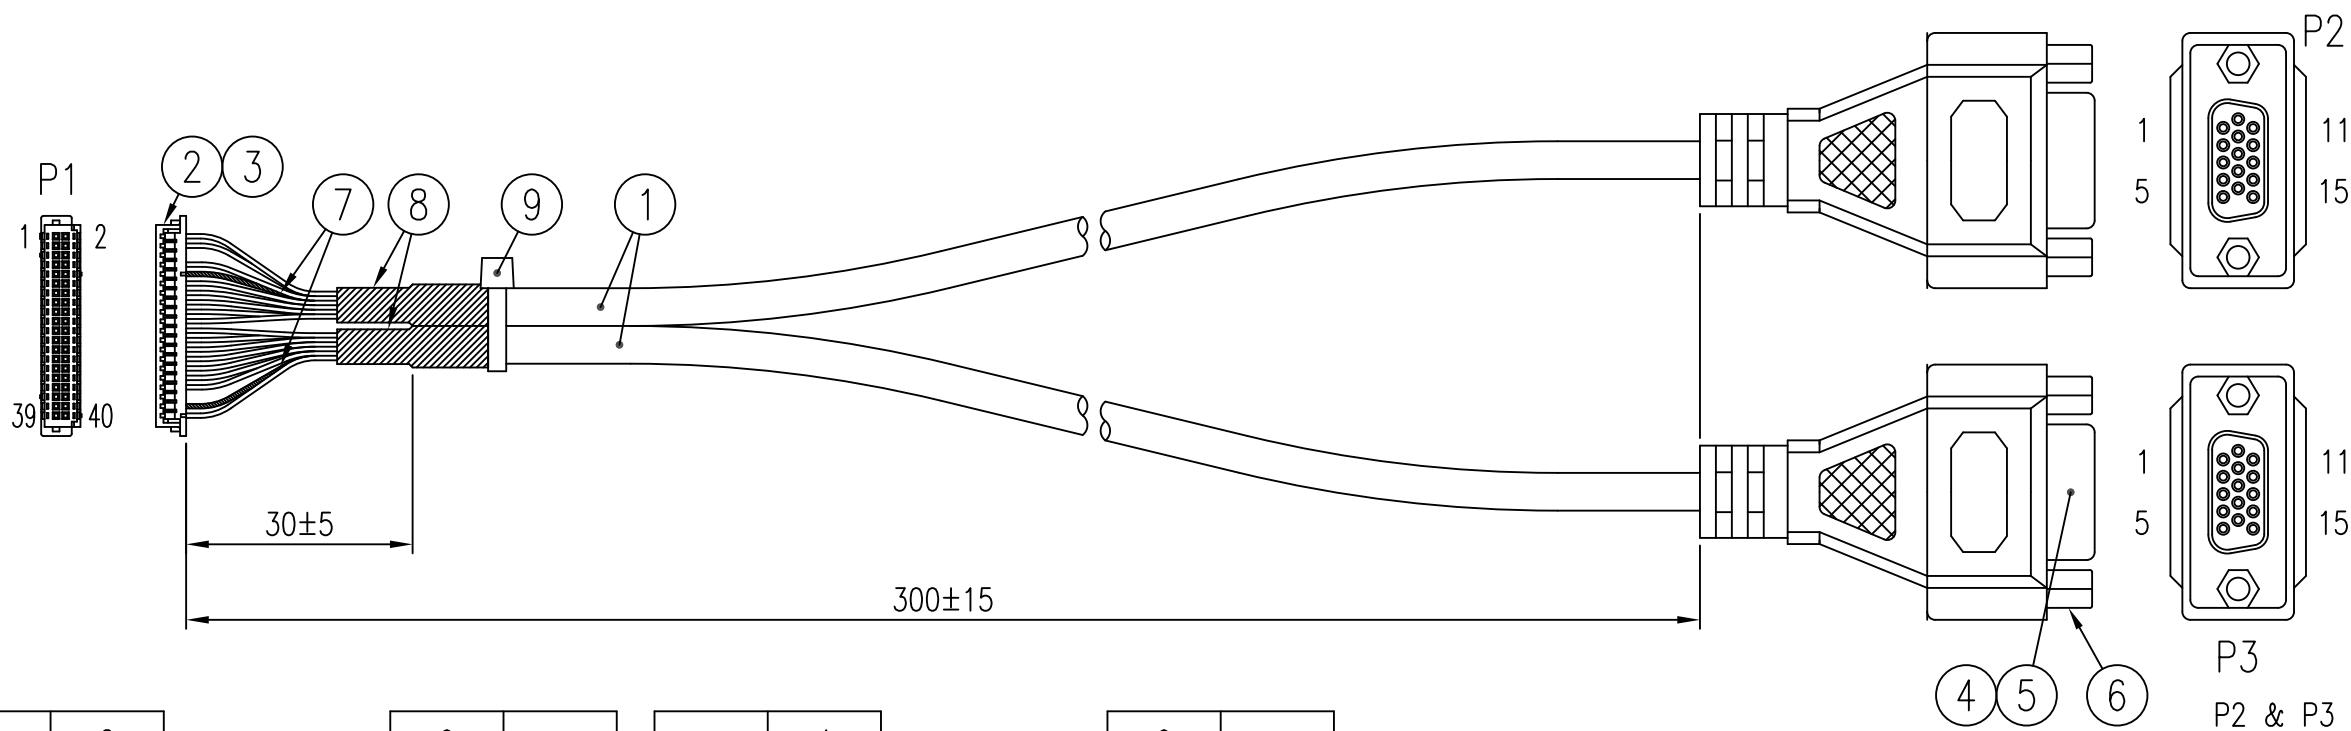

A

B

P1	2	P2	9	P3
	7		5	
	8		7	
	9		3	
	10		1	
	12		2	
	13		6	
	14		8	
	15		15	
	16		13	
	17		12	
	18		14	
	20		10	
	19		SHELL	

P1	4	P3	9
	21		3
	22		1
	24		2
	25		8
	26		5
	27		15
	28		13
	29		12
	30		14
	31		10
	32		6
	38		7
	37		SHELL

B



C

9		CABLE TIE	1 PC
8		HEAT SHRINKABLE TUBE, ø6.0mm, L = 20.0mm, BLACK	2 PCS
7		HEAT SHRINKABLE TUBE, ø1.5mm, L = 30.0mm, BLACK	2 PCS
6		NUT	4 PCS
5		MOLD, PVC, BLACK (INNER WITH COPPER FOIL)	A/R
4	HD-15SS-KS-NO/Gwo Jinn	HIGH DEMSITY D-SUB CONN., 15-POS., RECEPTACLE, 2.29mm PITCH, INSULATOR : BLACK	2 PCS
3	H13-P/E.C.I.	SOCKET CONTACT	26 PCS
2	H13H-2x20/E.C.I.	HOUSING, 40-POS., 1.25mm PITCH, BEIGE	1 PC
1	Spec./Xinya	CABLE, 28 AWG x 13C + ADB, UL 2725, BLACK	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

C

Electronics Test :
1. Hi-Pot Test : DC 300V/0.01S
2. Insulation Resistance : 2 MΩ (Min.)
3. Conductor Resistance : 3 Ω (Max.)
4. All cable open short and miss wire test : 100%

WIRING TABLE

DRAWN	Nicole Wang	3RD. ANGLE		MODEL NAME	 we move the world									
DESIGNED		SIZE / SCALE	A3 /	PART NAME						VGA CABLE CBL-S0025-0009				
APPROVED		SHEET	1 of 1	MATERIAL										
DATE	06/10/2014	UNIT	mm	TOLERANCE		PART NO.	7W9000000010		REV.	A				

D