


- 1.ELECTEONIC TEST CONDITION:
 1-1.100% OPEN-SHORT&MIS WIRE TEST.
 1-2.CONDUCTIVE RESISTANCE: 2 ohm/MAX
 1-3.INSULATION RESISTANCE: 10 Mohm/MIN AT DC250V

- 2.NOTE
 FQC/OQC CHARACTERISTICS FOR EVALUATION: "#1,#2,#3" MEASURE.
 3.MOLD NO:M-DC3.5-N35,M-DC3.5-35,

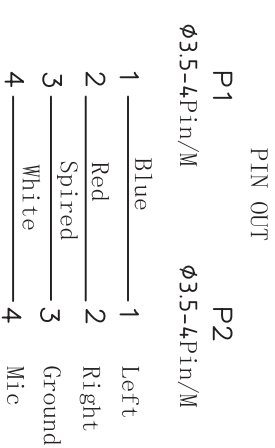

4	PP	PP<PP-01>	5	9
3	TPE	TPE, Black 85A	7	9
2	CONN1	3.5 4Pin M,G/F,Black Insulation,	1	PCS
1	CABLE	(24AWG/UEW+200D)*2C(Blue, Red)+[(24AWG White+200D)+S(24AWG)+200D TPE Jacket, OD:2.6±0.1MM Purple Shield OD:3.0	2000	mm
Item	Nome	Description	Q'TY	Unit

Dat	2015 / 06 / 15
Unit	mm
Projection	
Rev	A

DLOCK®
 we move the world

Title: Stereo Jack Cable 3.5 mm 4 pin
 male > male angled 0.5 / 1 / 2 / 3 / 5 m

Item no. 84761 - 84765
 Barcode 4043619847617
 File No. 88205

DLOCK®
 we move the world