


模具编号: P-38

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
2. CONTACT RESISTANCE: 0.5ohm.
3. INSULATOR RESISTANCE: 5M ohm.
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

NO	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑨	B.04025M.0N01R	CONNECTOR	AUDIO PLUG 2.5MM*4.5 3-POLE SHELL NICKEL PLATING PLASTIC: BLACK	1	PCS
⑧	I.150200.0307R	PE BAG	200*150*0.04MM PE BAG PRINTED BLACK"USB TO RS232 5V AUDIO PLUG 2.5MM	1	PCS
⑦	F.0501B0.0100R	TUBE	φ5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑥	L.000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	12.5	G
④	C.000000.0000R	MOLDING	PE	2.5	G
③	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N05R	CONNECTOR	TTL-RS232-PCB(5V) USB A/M CONNECTOR PLASTIC: WHITE	1	PCS
①	A.027X01.0202R	CABLE	UL2547 26AWG(7/0.16TC)*2C+S(44/0.10TC) PVC JACKET COLOR:BLACK OD=3.5±0.1mm L=1780MM	1	PCS

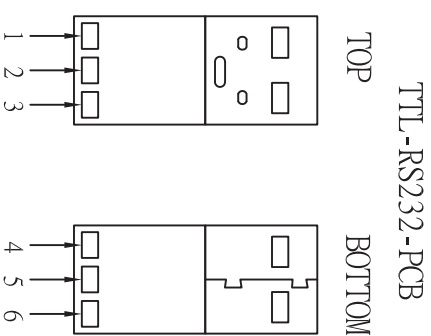



## PIN WIRING

P1

P2

- |   |         |        |
|---|---------|--------|
| 1 | RED(5V) | (VCC)  |
| 2 | ORANGE  | 1(TXD) |
| 3 | YELLOW  | 2(RXD) |
| 4 | GREEN   | (RTS#) |
| 5 | BLACK   | 3(GND) |
| 6 | BROWN   | (CTS#) |

	
<b>Title:</b> Cable USB TTL male > 2.5 mm 3 pin stereo jack male 5 V	
Unit	mm
Projection	
Rev	A
Item no.	83788
Barcode	4043619837885
File No.	88203