

1

2

3

4

5


6

CN2

M-Y269A

M-269A

WI-03-002

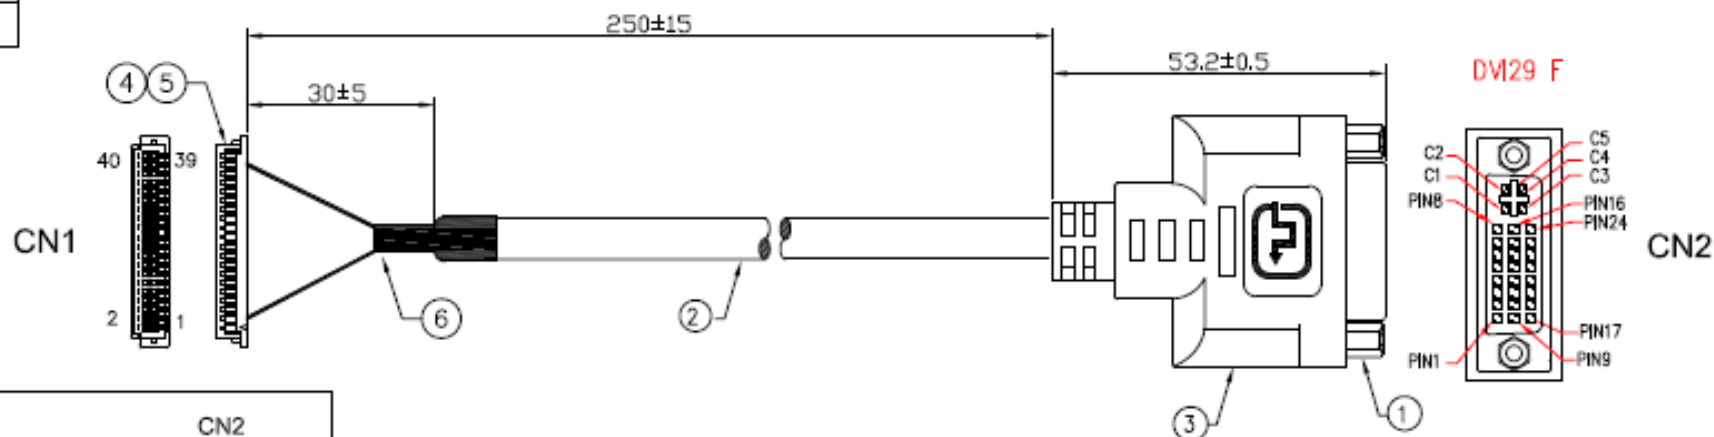

CN1		CN2	
7	—SHIELD—	11	地線
9		10	棕
11		9	白
8	—SHIELD—	19	地線
10		18	綠
12		17	白
14	—SHIELD—	3	地線
16		2	紅
18		1	白
32	—SHIELD—	22	地線
34		23	藍
36		24	白
4		14	紅
27		6	橙
29		7	黃
31		15	白
35		16	紫
37		C5	藍

6	BLACK HEAT SHRINK TUBE		
5	JCTC 11252H00-2*20P or TYU TU1257HNO-2*20P	1	
4	JCTC 11252T0P-2E-NK or TYU TU1257TP0-A	18	
3	BLACK HEAT SHRINK TUBE		
	ALUMINUM FOIL		
	MOLDED PE COLOR TRANSPARENT		
	MOLDED PVC BLACK		
2	UL20276 [(30AWG*1Pair+AL+D+MY)*4Pcs+(30AWG*1Pair)+(30AWG*5C)]+AL+AMA BRAID(65%), OD 5.5mm, HDMI CABLE,JACKET BLACK		
1	DVI29 FEMALE AND HEX-NUT(4.75*10mm) GOLD FLASH ON CONTACTS WHITE INSULATOR	1Set	
No.	DESCRIPTION	Q'TY	Supplier

DRAWN	Nicole Wang	3RD. ANGLE		MODEL NAME	EMPV-1201	 we move the world			
DESIGNED		SIZE / SCALE	A4 /	PART NAME	DVI CABLE CAH-DVI00005LG				
APPROVED		SHEET	1 of 1	MATERIAL					
DATE	01/22/2016	UNIT	mm	TOLERANCE		PART NO.	7W9000000040	REV.	A