




RJ45 PLUG



P1

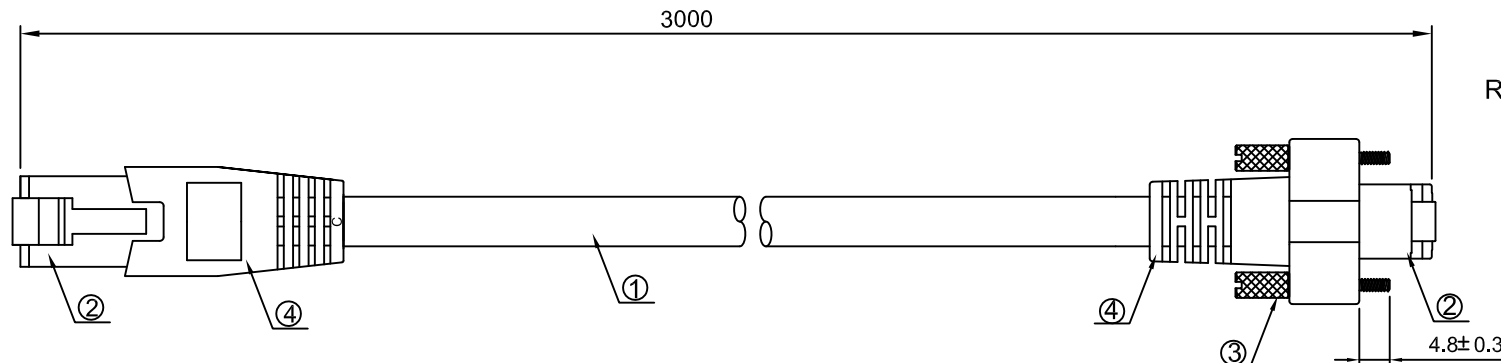


RJ45 PLUG



P2


SCREW DETAIL

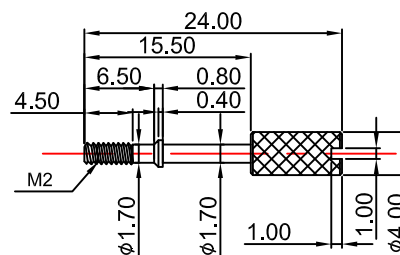

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01~0.28Sec.
 - (c). CONTACT RESISTANCE:3~10ohm MAX.

PIN ASSIGNMENT

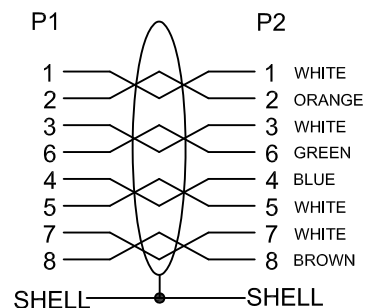

4		ALL CONNECTORS OVERMOLD BLACK PVC.
3	2	SCREW:M2 4.0*24.0MM NICKEL PLATED.
2	2	RJ45 8P8C PLUG WITH SHELL CAT6.
1	1	SSTP CAT. 6 (26AWG*1PAIR+AM)*4+BRAID OD:6.2MM BLACK PVC JACKET .CSA.
ITEM	QTY	DESCRIPTION

DELOCK®
we move the world

Title: Cable RJ45 > RJ45 plug with screws
Cat.6 SSTP 3 m

Date	2018 / 04 / 13	Item no.	85669
Unit	mm	Barcode	4043619856695
Projection			
Rev	A		