

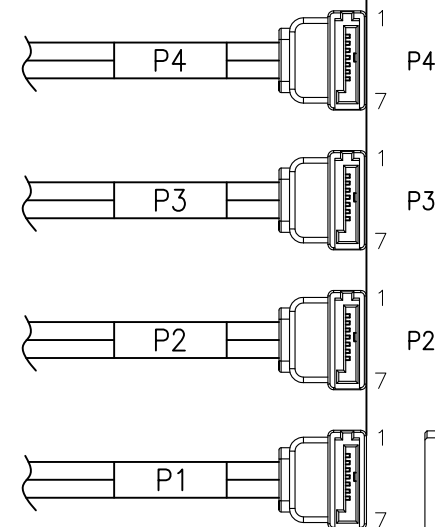


D9
C9
B9
A9

D1
C1
B1
A1



MATERIAL RoHS COMPLIANT:

1.CABLE:

CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER.
INSULATION: FOAM POLYOLEFIN.
PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
PAIR DRAIN WIRE: 30AWG SOLID TIN PLATED COPPER.
PAIR SHIELD: ALUMINUM/POLYESTER TAPE.
ALUMINUM SIDE FACING IN, 25% OVERLAP.
DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
UL RECOGNIZED: AWM STYLE 21490 80°C 30 VOLTS.

2.CONNECTOR:

P0: Mini SAS HD 4i CABLE PLUG (SFF-8643)
(1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS
(P/N: MPCB-040115NLF REV.A / MPCB-040116NLF REV.A)
(2) HOUSING: PBT, COLOR: BLACK.
P1-P4: SATA 7P LOW PROFILE R/A REC.(USAT-F073RA0E)

DELOCK
we move the world

Title: Cable Mini SAS HD SFF-8643 >
4 x SATA 7 Pin angled 0.5 m

Date	2018 / 06 / 07	Item no.	85684
Unit	mm	Barcode	4043619856848
Projection			
Rev	A		