



REV	ECRN	DATE
1	NEW PRODUCTION	20180630

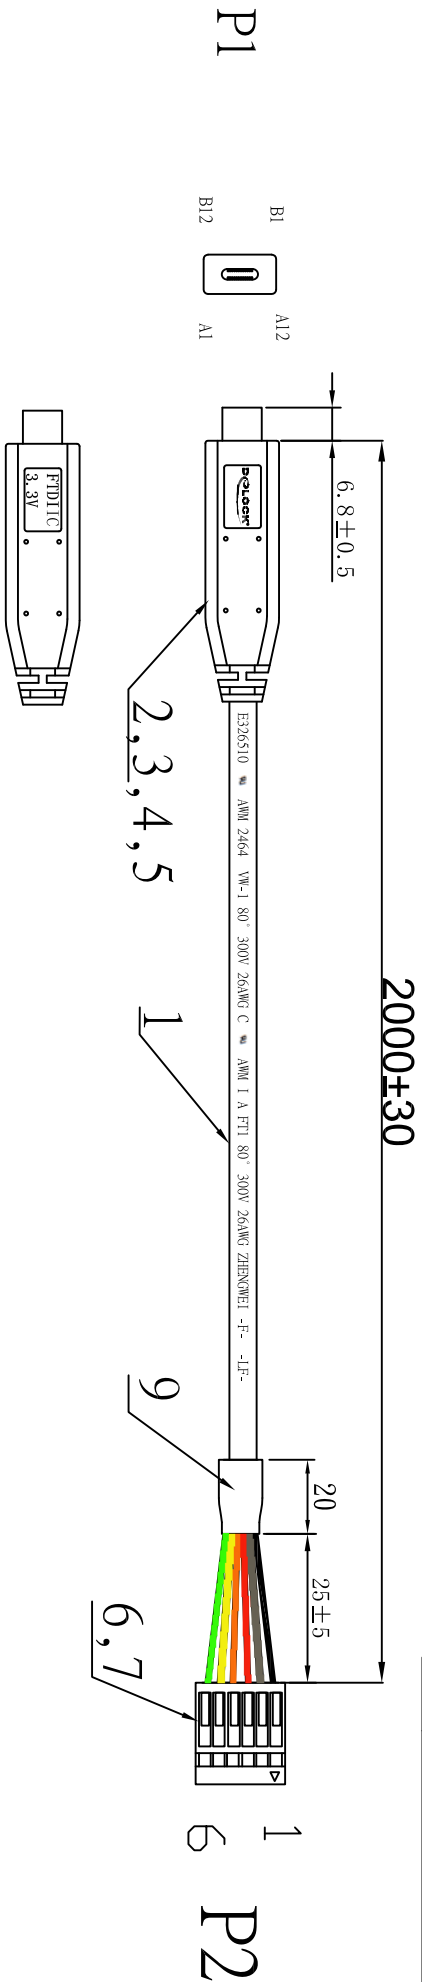

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
 2. CONTACT RESISTANCE: 0.5ohm,
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.



⑩	I. 180150. 0301R	PE BAG	180*150*0.04MM PE BAG	1	PCS
⑨	F. 0501B0. 0100R	TUBE	Φ5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑧	I. 0000001. 0400R	TIE	TIE BLACK L=70MM	1	PCS
⑦	E. 00254M. 0600R	HOUSING	Dupont 2.54mm 1*6P HOUSING	1	PCS
⑥	D. 00254F. 1400R	TERMINAL	Dupont 2.54mm TERMINAL	6	PCS
⑤	C. 045P01. 0100R	MOLDING	PVC 45P BLACK	5.5	G
④	C. 000000. 0000R	MOLDING	PE	2.5	G
③	J. 0000008. 0500R	TIN WIRE	TIN WIRE OD: 0.8MM	3.5	G
②	B. 01004M. 0N05R	CONNECTOR	TTL-RS232-PCB(3.3V) TYPE C/M CONNECTOR PLASTIC: BLACK	1	PCS
①	A. 009X01. 0603R	CABLE	UL2464 26AWG(7/0.16TC)*6C(RED, ORANGE, GREEN BLACK, YELLOW, BROWN)+AL FOIL PVC JACKET COLOR: BLACK OD=5.0±0.1mm L=2000MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

- Packaging requirements
1. For each IPCS of wire binding according to the size of wire binding PE bag & label packaging for customers:
 2. Each case must be equipped with IPCS large waterproof bag:
 3. The weight of each box must be within 10KG:
 4. The actual number of containers shall prevail:
 5. The quantity of each batch of containers shall be the same.

PIN WIRING

P1	P2
1 RED(5V)	3(VCC)
2 ORANGE	4(TXD)
3 YELLOW	5(RXD)
4 GREEN	6(RTS#)
5 BLACK	1(GND)
6 BROWN	2(CTS#)

DLOCK® we move the world		
Title: Converter USB Type-C™ 2.0 male to LVTTTL 6 pin pin header female 2.0 m		
Date	2018 / 07 / 03	
Unit	mm	Item no. 63913
Projection		Barcode 4043619639137
Rev	A	File No. 88203