

1 2 3 4 5 6

A

A

B









B

C

C


D

D

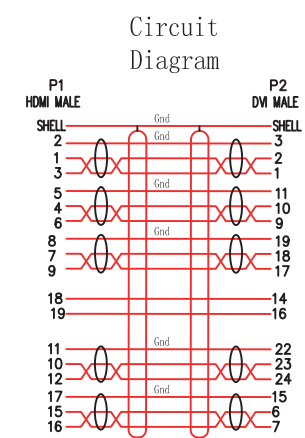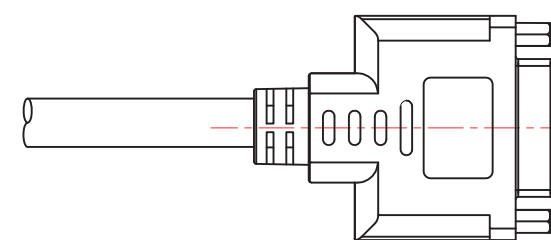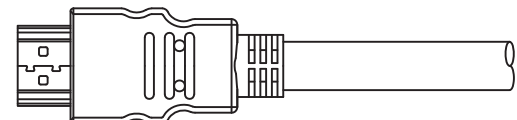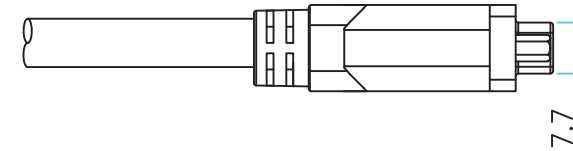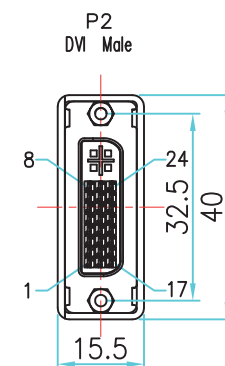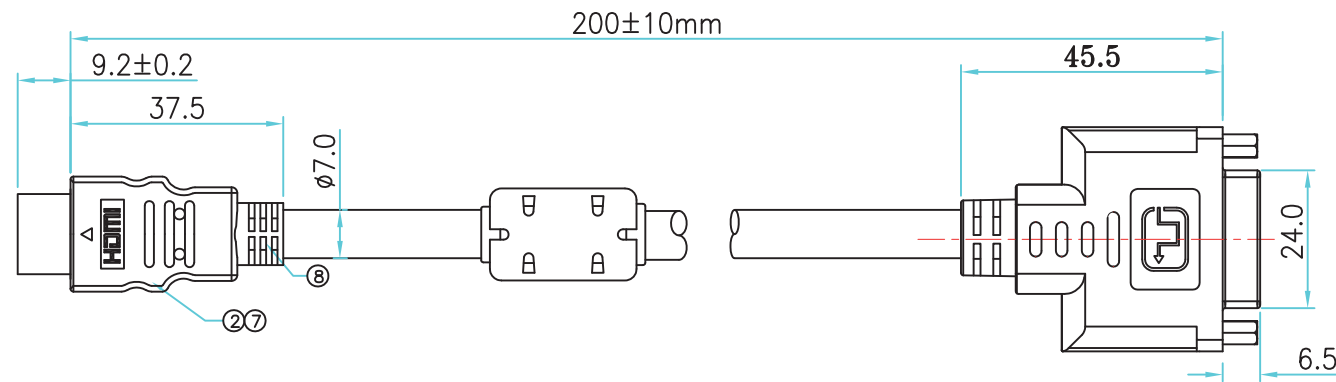


- Electrical Test:
- 1.Contact Resistance: 3Ω Max
 - 2.Insulation Resistance: 5MΩ Min
 - 3.HI-POT: 300V DC/10MS.
 - 4.Real Test Passed: 1280*720P,1920*1080P 60HZ and 3840*2160 30Hz
 - 5.Real Test Not Twinkling,Double Vision and Decolor

10	DUST CAP	LDPE Color:Natural	2
9	Molding &SR	PVC Color:Black	1
8	Internal Molding	LDPE Color:Natural	1
7	Magnet ring	Spec:F2 RH 12*20*7.3mm COLOR:Black	1
6	Shielding DVI	Shell Spcc Ni Plated	1
5	Shielding Down HDMI	Shell Spcc Ni Plated	1
4	Shielding UP HDMI	Shell Spcc Ni Plated	1
3	DVI Female	Housing PBT Black , Shell Spcc Ni Plated, Contact Phosphor Bronze Gold flash	1
2	HDMI A Type Male	Contact C5210EH Gold Flash ,Shell Spcc Ni Plated ,Housing LCP Black	1
1	CABLE	(7/0.127T*1P+D+AL+MY)*5C+7/0.127T*5C+ADB16/6/0.120T OD=7.0 mm PVC Color:Black	1
No.	Title	Description	QTY



DELOCK®
we move the world

Title: Adapter Cable HDMI Male to DVI 24+5 Female 4K 30 Hz 20 cm

Date	2020 / 04 / 16	Item no.	65206
Unit	mm	Barcode	4043619652068
Projection		File No.	88160
Rev	A		

1 2 3 4 5 6