
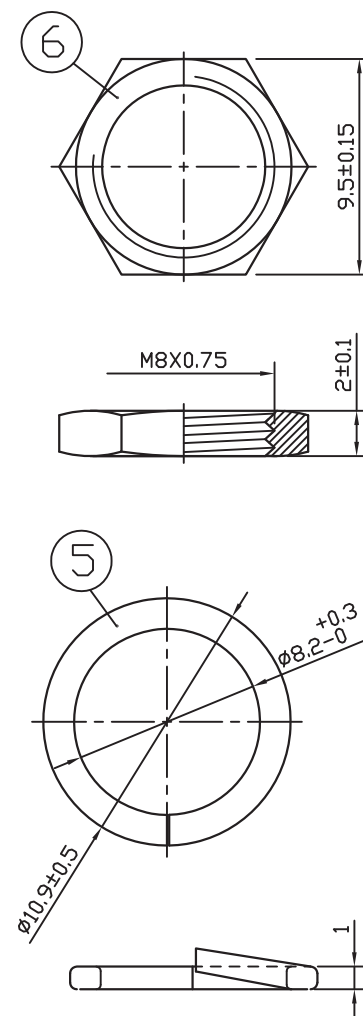


D

BOTTOM VIEW

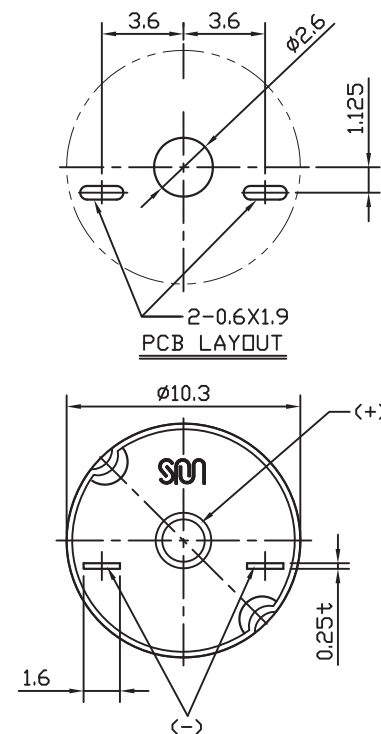

PIN 組立 : 159-081

符合 RoHs 標準

1. Dielectric strength: AC 500V/1 minute.

2. Insulation resistance: 100MΩ or over. (DC 500V)

3. Contact resistance: $30\text{m}\Omega$ or less.


4.Extraction force :0.3~3Kg.

5,RATING: DC 20V 10A



we move the world

Title:	Connector DC 5.5 x 2.5 mm female bulkhead soldering version - round 20 V / 10 A
--------	---

Date	2023 / 11 / 30	Title: connector DE 3.5 x 2.5 1mm female bulkhead soldering version - round 20 V / 10 A	
Unit	mm	Item no.	90176
Projection		Barcode	4043619901760
Rev	A	File No.	88276