


SECTION H-H
SCALE (1:1)

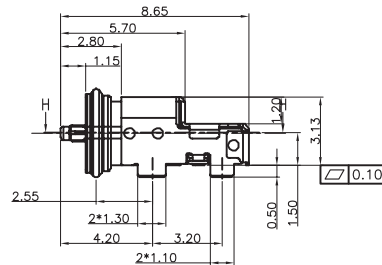

SECTION G-G
SCALE (2:1)

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Specifications:

Current Rating:5.0A AC,DC

Voltage Rating:100V AC,DC

Contact Resistance:40M Ohm Max

Insulation Resistance:100M Ohm Min

Withstanding Voltage:100V AC/Minute

Operating Temperature Range:−40°C to +85°C

Mechanical:

Mating Force:5~20N Max

Unmating Force:8~20N Min

Durability:10000 cycles Min


Materials:

Insulator:High Temp.Plastic (LCP UL94V-0)

Contact:Brass

Contact Plating:Gold Plated on Contact Area,
Matte-Tin Plated on Solder Tail.

Shell:Stainless Nickel 50u" Plated

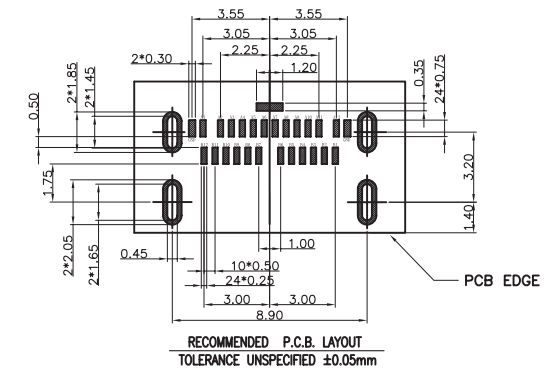

DELOCK
we move the world

Title: USB 5 Gbps USB Type-C™ Buchse 24 Pin
SMD Steckverbinder zur Lötmontage

Item no. 66944

File No.

Date	2024 / 02 / 22
Unit	mm
Projection	sketch
Rev	A