

#### Specifications:

Current rating: 1.5A AC, DC

Voltage rating: 30V AC, DC

Contact resistance: 30m ohm max.

Insulation resistance: 1,000M ohm min.

Withstanding voltage: 600V AC/minute

Operating Temperature range: -40°C to +85°C





Material:

Insulator: High Temp Plastic (LCP UL94V-0)

Standard Color: Blue

Contact: Copper Alloy

Finish: Selective Gold Plated

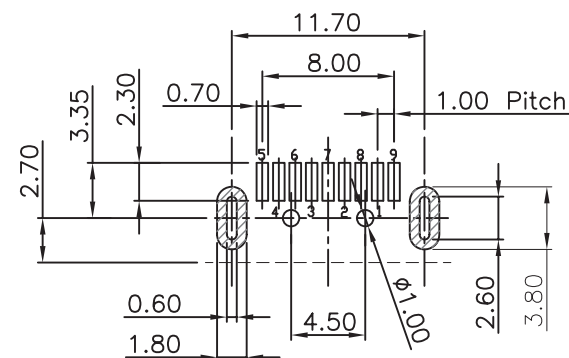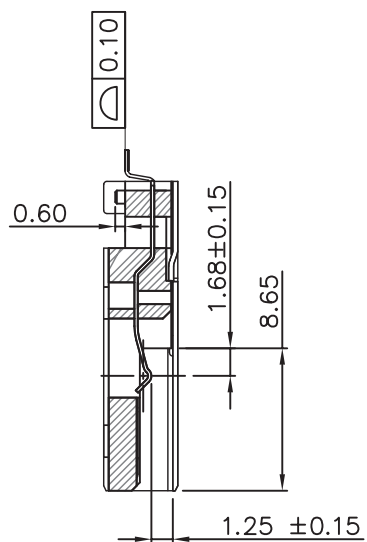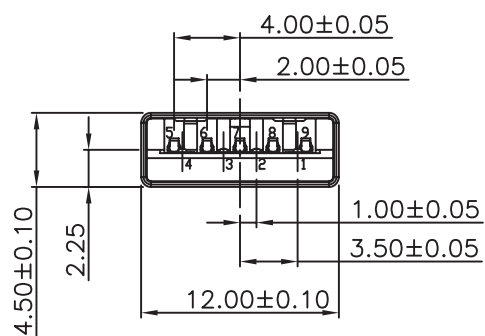

**DELICK®**  
we move the world

Title: USB 5 Gbps Typ-A Stecker 9 Pin SMD Steckverbinder zur Lötmontage 90° gewinkelt

Item no. 66946

|            |                |
|------------|----------------|
| Date       | 2024 / 02 / 22 |
| Unit       | mm             |
| Projection | sketch         |
| Rev        | A              |

File No.