

Delock WLAN 802.11 a/ax/a/b/g/n Antenna RP-SMA plug 5 dBi 20 cm omnidirectional with tilt joint flexible and rubber surface black

Description This Wireless LAN antenna by Delock can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals. Buetoth University of origin: China

Specification

- Connector: 1 x RP-SMA plug
- Frequency range: 2.400 - 2.500 GHz
 - 5.150 5.850 GHz
- Antenna gain: 5 dBi
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- VSWR: 2.5
- Operating temperature: -10 °C ~ 70 °C
- Colour: black
- Length:
 ca. 200 mm (with tilt joint)
 ca. 177 mm (without tilt joint)
- Diameter:

ca. 12.70 mm (RP-SMA)

Package: Retail Box




System requirements

• Device with a free RP-SMA jack

Package content

• WLAN antenna

Images

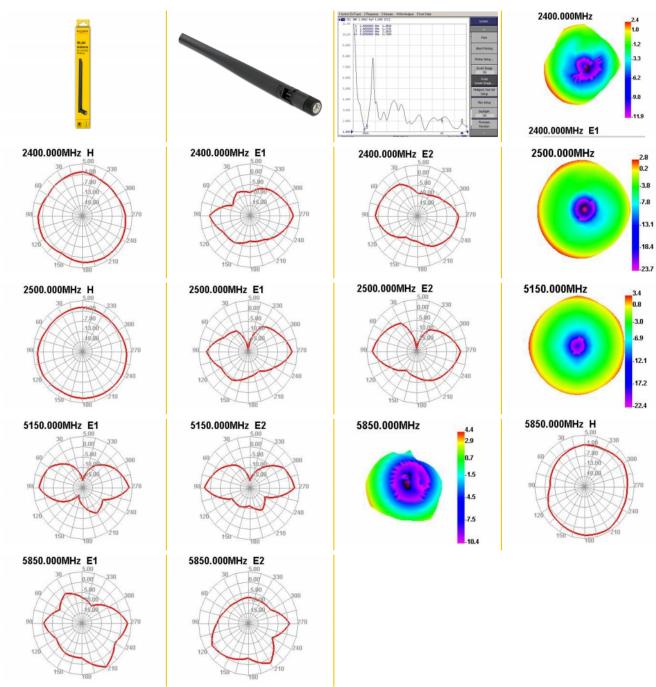

© 2024 by Tragant. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

DATASHEET



General

Mounting type:	Screw mounting
Suitable for indoor:	yes

Interface

connector:	1 x RP-SMA plug

Technical characteristics

Frequency range:	5150 MHz - 5850 MHz 2400 MHz - 2500 MHz
Antenna gain:	5 dBi
Impedance:	50 Ω
Operating temperature:	-10 °C ~ 70 °C
Polarisation:	linear vertical
VSWR:	2.5

Physical characteristics

Antenna type:	omnidirectional
Housing material:	ABS
Length:	20 cm
Diameter connector:	12.7 mm
Colour:	black