


# Delock USB and Wireless Charger 2 x USB Type-C™ PD + 3 x USB Type-A with 110 W

## Description

This **USB Power Delivery (PD)** charger by Delock can be used to charge laptops with **USB Type-C™** connector. It provides various voltages from 5 V to 20 V and power up to 100 watt. In addition, **three USB Type-A** connectors with fast charging technology are available for smartphones.

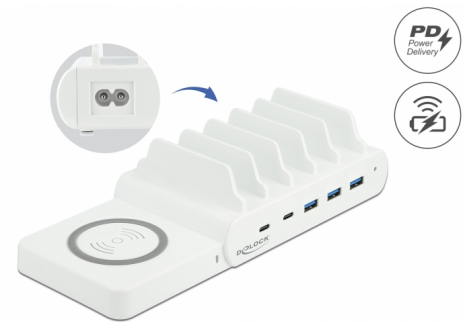

## Integrated holders

The holders allow several devices, such as smartphones or tablets, to be placed on the charging station to **save space**.

## Wireless fast charging

The charger supports fast charging of up to **15 W** with appropriately equipped smartphones.

## Note

For charging with 100 W a suitable USB-C PD cable with 5 A is required.

**Item no. 41450**

EAN: 4043619414505

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - 2 x USB Type-C™ female
  - 3 x USB Type-A female
  - 1 x IEC-60320-C8 connector
- Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 2.4 A
- Output:
  - USB-C™ 5.0 V / 9.0 V / 12.0 V / 15.0 V 3.0 A, 20.0 V 5.0 A (max. 100.0 W)
  - USB-A 3.6 - 15.0 V 3.0 A, 16.0 V - 20.0 V 3.5 A (max. 70.0 W)
- Output power: max. 110.0 W total
- Wireless charging: 5.0 W / 7.5 W / 10.0 W / 15.0 W
- Frequency range: 110 - 205 kHz
- Transmission power: max. 15 W
- Average active efficiency 86.69 %

- Efficiency at low load (10 %) 84.94 %
- No-load power consumption 0.24 W
- Overload protection
- Over current protection
- Overheating protection
- Short circuit protection
- Colour: white
- Dimensions (LxWxH): ca. 236 x 95 x 56 mm

---

## Package content

- USB charging station
- Wireless charging module
- Power cord, length ca. 1.5 m
- User manual

---

## Images



## Physical characteristics

Housing colour:	white
-----------------	-------

## Power supply

Type:	Power supply with IEC connector
Input:	AC 100 - 240 V / 50 - 60 Hz / 2.4 A
Output:	12.0 V / 3.0 A 15.0 V / 3.0 A 5.0 V / 3.0 A 9.0 V / 3.0 A 20.0 V / 5.0 A
Connector:	3 x USB type-A female 2 x USB Type-C™ female