


# Delock Mobile Rack Inner Tray 1 x M.2 NVMe SSD for Mobile Rack 47003

## Description

This mobile rack inner tray by Delock allows the installation of an **M.2 SSD** in 2280, 2260, 2242 or 2230 format and is compatible with mobile rack 47003.

### Metal tray with springs

The stable carrier of metal has springs on the top and bottom which **reduce vibrations**.

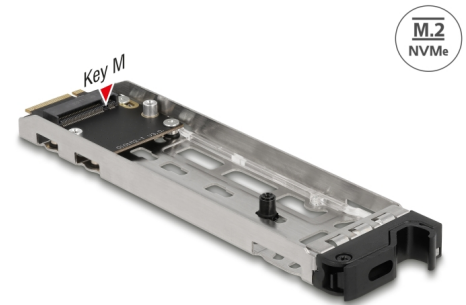

**Item no. 47004**

EAN: 4043619470044

Country of origin: China

Package: Box

## Specification

- Connectors:
  - 1 x 67 pin M.2 Key M male
  - 1 x 67 pin M.2 key M slot
- Interface: PCIe / NVMe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Material: metal
- Operating temperature: -40 °C ~ 85 °C

## System requirements

- Mobile rack 47003 by Delock

## Package content

- Mobile rack intray
- Heat sink
- 1 x thermal conductive pad
- Screws
- User manual

## Images



## Interface

Internal:	1 x 67 pin M.2 key M slot 1 x 67 pin M.2 Key M male
-----------	--

## Technical characteristics

Data transfer rate:	32 Gbps
---------------------	---------