

# Delock SATA 6 Gb/s DOM Module 32 GB MLC SATA Pin 8 power -40 $^{\circ}$ C $\sim$ 85 $^{\circ}$ C

#### **Description**

This SATA DOM module by Delock is especially suitable for use in indutrial PCs und Server.

The module has an extended temperature range of -40  $^{\circ}$  C  $^{\sim}$  85  $^{\circ}$  C and is designed for use in harsh operating conditions.



32 GB

**Advantage:** No additional power supply is required as power is provided via the SATA pin 8 connector. To use this application, a motherboard with SATA pin 8 connector is needed. The SATA pin 8 connector on the motherboard is of yellow colour. If no SATA pin 8 connector is available, this module can also be used via the standard SATA connector. For this purpose, the power supply is provided via the 3 pin power connector.

#### Item no. 54749


EAN: 4043619547494

Country of origin: Taiwan,


Republic of China

Package: Antistatic cover

# Schematic representation for SATA Pin 8

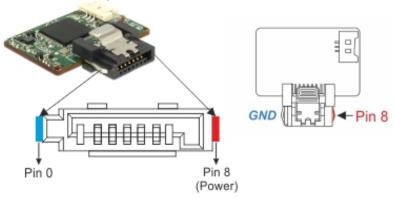

# Standard power supply

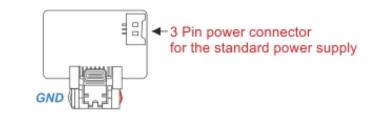



#### **Specification**

• Capacity: 32 GB

Interface: SATA 6 Gb/sSupports SATA pin 8 power

Chip: ToshibaFlash type: MLC

• Maximum performance: 100 MB/s read, 40 MB/s write

• Maximum write cycles: 3000

• Maximum power consumption: 1.8 W (5 V x 370 mA)

Write protect: noATA Security: yesS.M.A.R.T.: yesThermal sensor: yes

• Dimensions (WxLxH): 30 x 28.4 x 7.4 mm

Vibration: 20G @ 7 ~ 2000 Hz
Shock: 1500G @ 0.5 ms
MTBF: >3 million hours

• Operation temperature: -40 °C ~ 85 °C - Industrial grade

• Storage temperature: -55 °C ~ 95 °C

#### System requirements

• A free SATA 8 pin or SATA 7 pin port

• For SATA 7 pin: power supply with a free 4 pin power connection

#### Package content

- SATA DOM module
- Power cable

#### **Images**











### **Technical characteristics**

Chipset:	Toshiba
Storage temperature:	-55°C - 95°C
Read:	100 MB/s
Maximum power consumption:	1.8 W
Maximum write cycles:	3000
MTBF:	3 million hours
Interface:	SATA 6.0 Gb/s
Shock:	1500 G @ 0.5 ms
Write:	40 Mb/s
Capacity:	32 GB
Thermal sensor:	yes
Vibration:	20 G @ 7 ~ 2000 Hz
Password protection:	Yes
Delock iSmart:	Yes

# **Physical characteristics**

Length:	28.4 mm
Width:	30 mm
Height:	7.4 mm