

Delock SATA 6 Gb/s DOM Module 64 GB MLC SATA Pin 8 power -40 °C ~ 85 °C

Description

This SATA DOM module by Delock is especially suitable for use in industrial PCs und Server.

The module has an extended temperature range of -40 °C ~ 85 °C and is designed for use in harsh operating conditions.

Advantage: No additional power supply is required as power is provided via the SATA pin 8 connector. To use this application, a motherboard with SATA pin 8 connector is needed. The SATA pin 8 connector on the motherboard is of yellow colour. If no SATA pin 8 connector is available, this module can also be used via the standard SATA connector. For this purpose, the power supply is provided via the 3 pin power connector.



64 GB


Item no. 54780

EAN: 4043619547807

Country of origin: Taiwan,
Republic Of China

Package: Antistatic cover

Schematic representation for SATA Pin 8

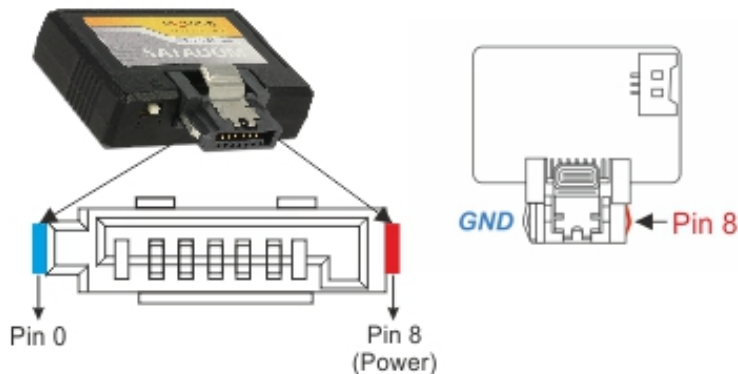

Standard power supply



Specification

- Capacity: 64 GB
- Interface: SATA 6 Gb/s
- Supports SATA pin 8 power
- Chip: Toshiba
- Flash type: MLC
- Maximum performance: 540 MB/s read, 90 MB/s write
- Maximum write cycles: 3000
- Maximum power consumption: 2.39 W (5 V x 478 mA)
- Write protect: yes
- ATA security: yes
- S.M.A.R.T.: yes
- Thermal sensor: yes
- Dimensions (width x length x height): 37.17 x 31.50 x 10.20 mm
- Vibration: 20G @ 7 ~ 2000 Hz
- Shock: 1500G @ 0.5 ms
- MTBF: >3 million hours
- Operation temperature: Industrial grade -40 °C ~ 85 °C
- Storage temperature: -55 °C ~ 95 °C



System requirements

- A free SATA 8 pin or SATA 7 pin connector
- For SATA 7 pin: power supply with a free 4 pin power connection

Package content

- SATA DOM module
- Power cable

Images



Technical characteristics

| | |
|----------------------------|--------------------|
| Chipset: | Toshiba |
| Storage temperature: | -55°C - 95°C |
| Read: | 540 MB/s |
| Maximum power consumption: | 2.39 W |
| Maximum write cycles: | 3000 |
| MTBF: | 3 million hours |
| Interface: | SATA 6.0 Gb/s |
| Shock: | 1500 G @ 0.5 ms |
| Write: | 90 MB/s |
| Write protect: | yes |
| Capacity: | 64 GB |
| Thermal sensor: | yes |
| Vibration: | 20 G @ 7 ~ 2000 Hz |
| Password protection: | Yes |

Physical characteristics

| | |
|---------|----------|
| Length: | 31.50 mm |
| Width: | 37.17 mm |
| Height: | 10.20 mm |