


Delock DIMM DDR3L 2 GB 1600 MHz 1.35 / 1.5 V Industrial

Description

This DIMM by Delock is suitable for installation in server, industrial PCs and general industrial applications. The memory is ideal for use in harsh environments. Furthermore it supports an operation with 1.35 V (low voltage) and 1.5 V.

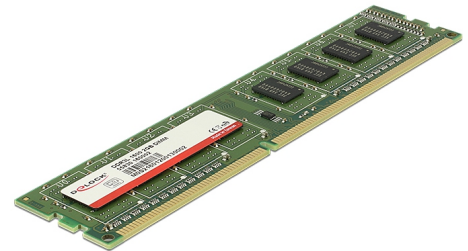

2 GB

Item no. 55830

EAN: 4043619558308

Country of origin: Taiwan,
Republic of China

Package: Box

Specification

- Storage capacity: 2 GB
- Pin: 240
- Chipset: Samsung
- Assembly: 256Mx8
- Frequency: 1600 MHz
- Function: Unbuffered - Non ECC
- Bandwidth: 64 Bit
- Voltage: 1.35 V and 1.5 V
- Operating temperature: 0 °C ~ 85 °C

System requirements

- A free DIMM socket with 240 pin

Package content

- DIMM module

Interface

| | |
|--------|------|
| DDR 3: | DIMM |
|--------|------|

Technical characteristics

| | |
|------------------------|-----------------|
| Buswidth: | 64 bit |
| Assembly: | 256Mx8 |
| Chipset: | Samsung |
| Frequency: | 1600 MHz |
| Operating temperature: | 0 °C ~ 85 °C |
| Module speed: | PC3 - 12800 |
| Pin: | 240 |
| Voltage: | 1.35 V 1,5 V |
| Capacity: | 2 GB |