


# Delock DIMM DDR3L 2 GB 1600 MHz 1.35 V / 1.5 V -40 °C ~ 85 °C Industrial

## Description

This DIMM by Delock is suitable for installation in server, industrial PCs and general industrial applications. The memory is ideal for use in harsh environments and has an extended temperature range of -40 °C ~ 85 °C. Furthermore it supports an operation with 1.35 V (low voltage) and 1.5 V.

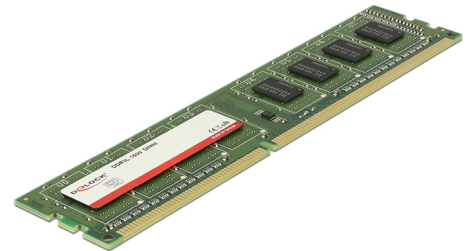

2 GB

**Item no. 55842**

EAN: 4043619558421

Country of origin: Taiwan,  
Republic of China

Package: Box

## Specification

- Storage capacity: 2 GB
- Pin: 240
- Chipset: Micron - Low voltage
- Assembly: 256Mx8
- Frequency: 1600MHz
- Module speed: PC3-12800
- Function: unbuffered - non ECC
- Bandwidth: 64 bit
- Voltage: 1.35 V / 1.5 V
- Operating temperature: -40 °C ~ 85 °C

## System requirements

- A free DIMM socket with 240 pin

## Package content

- DIMM module

## Interface

DDR 3:	DIMM
--------	------

## Technical characteristics

Buswidth:	64 bit
Assembly:	256Mx8
Chipset:	Micron
Frequency:	1600 MHz
Operating temperature:	-40 °C ~ 85 °C
Module speed:	PC3 - 12800
Pin:	240
Voltage:	1.35 V 1,5 V
Capacity:	2 GB