


Navilock Connection Cable MD6 female serial > 5 x open wires TTL (5 V) 52 cm

Description

The connection cable by Navilock converts the serial signals for all MD6 receivers to TTL 5 V signals. Compatible with TTL/CMOS is this interface suitable for GPIO, UART, Controller and CPU.

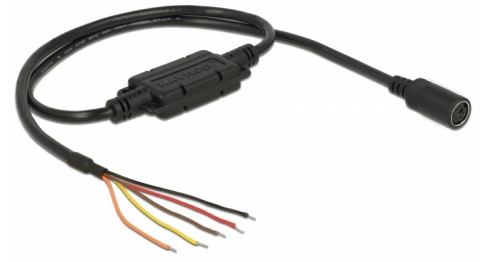

ca. 52 cm

Item no. 62884

EAN: 4043619628841

Country of origin: Taiwan,
Republic of China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x MD6 jack >
 - 1 x 5 pin open wire
- Chipset: ASIX ZT3221LEYY
- Cable gauge: 28 AWG
- Voltage: 5 V
- Cable colour: black
- Cable length incl. connectors: ca. 52 cm

System requirements

- A Navilock serial MD6 GNSS receiver

Package content

- Connection cable for GNSS receiver
- Navilock support CD

Images



Interface

connector:	1 x MD6 jack
Connector 1:	5 x open wires

Technical characteristics

Chipset:	ASIX ZT3221LEEY
Voltage:	5 V

Physical characteristics

Cable colour:	black
Cable length incl. connector:	52 cm