


# Navilock Connection Cable M8 female serial waterproof > 3,5 mm 4 pin stereo jack male 90° TTL (5 V) 1.2 m

### Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS 5.0 V this I/O interface is suitable for GPIO, UART, controller and CPU.



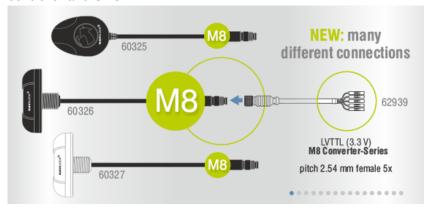

ca. 1,2 m

### Item no. 62887

EAN: 4043619628872

Country of origin: Taiwan, Republic of China

Package: Zip poly bag

# **Specification**

· Connectors:

1 x M8 female >

1 x 3.5 mm 4 pin stereo jack male 90°

• Chipset: ASIX ZT3221LEEY

• Data transfer: bidirectional

Cable gauge: 28 AWG

Voltage: 5 VWaterproof

Cable colour: black

• Length incl. connectors (L): ca. 1.2 m

## System requirements

· A Navilock serial M8 GNSS receiver





# Package content

- Connection cable for M8 GNSS receiver
- Navilock support CD

# **Images**







### General

Protection category:	waterproof
Style:	angled 90°

### Interface

connector:	1 x M8 female
Connector 1:	1 x 3.5 mm 4 pin audio stereo jack male

# **Technical characteristics**

Chipset:	ASIX ZT3221LEEY
Voltage:	5 V

# **Physical characteristics**

Cable colour:	black
Cable length incl. connector:	120 cm