


Navilock Connection Cable M8 female serial waterproof > 5 x open wire TTL (5 V) 1.2 m

Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS is this interface suitable for GPIO, UART, Controller and CPU.



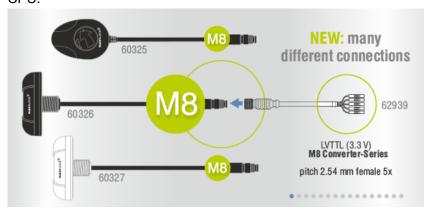

ca. 1,2 m

Item no. 62892

EAN: 4043619628926 Country of origin: Taiwan, Republic of China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x M8 female >
 - 1 x 5 pin open wire
- Chipset: ASIX ZT3221LEEY
- Cable gauge: 28 AWG
- Voltage: 5 V
- Waterproof
- Cable colour: black
- Cable length incl. connectors: ca. 1.2 m

System requirements

• A Navilock serial M8 GNSS receiver





Package content

- Connection cable for M8 GNSS receiver
- Navilock support CD

Images





General

|--|

Interface

connector:	1 x M8 female
Connector 1:	1 x open wire

Technical characteristics

Chipset:	ASIX ZT3221LEEY
Voltage:	5 V

Physical characteristics

Cable colour:	black
Cable length incl. connector:	1.20 m