


# Delock Converter M.2 Key A+E male > 1 x Serial RS-232 male

## Description

This converter by Delock expands the system by one serial RS-232 port.

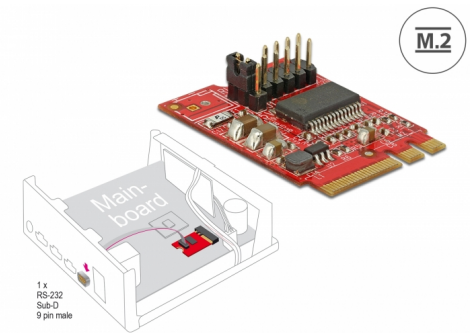

**Item no. 62951**

EAN: 4043619629510

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Specification

- Connectors:
  - 1 x 59 pin M.2 key A+E male >
  - 1 x 10 pin pin header
  - 1 x serial RS-232 D-Sub 9 pin male with nuts on cable
- Chipset: Prolific PL2303
- Interface: USB
- Jumper setting RI or 5 V on pin 9
- Form factor: M.2 2230
- Suitable for M.2 slot with key A or key E based on USB
- Data transfer rate up to 230.4 Kb/s
- Compatible with 16C550 UART
- Dimensions (LxWxH): ca. 30 x 22 x 8 mm

## System requirements


- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38 / Kernel 4.9.2
- One free M.2 key A or key E slot

---

## Package content

- Converter
  - 1 x RS-232 connection cable, length ca. 25 cm
  - 1 x fixing screw
  - User manual
- 

## Images



## General

Form factor:	M.2 2230
Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	USB

## Interface

Connector 1:	1 x 59 pin M.2 key A+E male
Connector 2:	1 x Serial RS-232 DB9 male
connector 3:	1 x 10 pin pin header

## Technical characteristics

Chipset:	Prolific PL2303
Data transfer rate:	up to 230.4 Kb/s

## Physical characteristics

Length:	30 mm
Width:	22 mm
Height:	8 mm