

Delock Converter mSATA male > 2 x SATA 7 pin male with RAID


Description

This converter by Delock expands the system by two SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes. Through the predetermined breaking point, the length can be shortened from full size to half size.

Note

This product provides a chipset-based RAID function. Management and setting of the RAID mode is not possible via the operating system or BIOS. Different diagnostic software is not compatible with this solution.

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

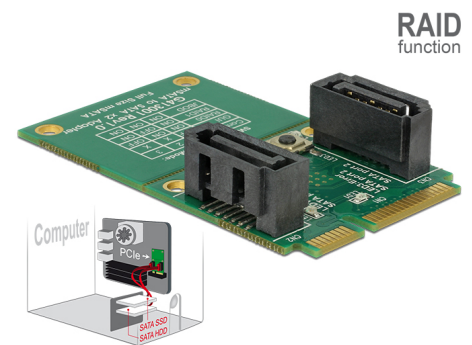

Item no. 62962

EAN: 4043619629626

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Specification

- Connectors:
1 x 52 pin mSATA / Mini PCI Express male >
2 x SATA 6 Gb/s 7 pin plug
- Chipset: Asmedia ASM1092R
- Interface: SATA
- Form factor: full size / half size
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD
- Supports HDD and SSD
- Bootable
- 1 x button for RAID setting
- 1 x DIP switch for RAID mode
- Dimensions (LxWxH): ca. 51 x 30 x 11 mm

System requirements



- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38 / Kernel 4.9.4

- A free mSATA interface

Package content

- Converter
- User manual

Images



General

Form factor:	mSATA
Function:	bootable
Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA

Interface

Connector 1:	1 x 52 pin mSATA / Mini PCI Express male
Connector 2:	2 x SATA 6 Gb/s 7 pin plug

Technical characteristics

Chipset:	Asmedia ASM1092R
Data transfer rate:	6 Gb/s
RAID function:	JBOD 0 1

Physical characteristics

Length:	51 mm
Width:	30 mm
Height:	11 m