


Delock Converter M.2 Key B+M male > 2 x SATA pin 8 power plug

Description

This converter by Delock expands the system by two SATA pin 8 power ports. It enables the connection of e.g. SATA DOM memories with SATA pin 8 power receptacle support. By the help of the two additional power connectors, it is possible to connect SATA DOM memories with standard power supply.

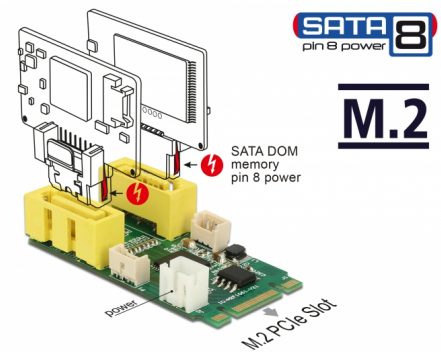

Item no. 63464

EAN: 4043619634644

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 1 x 59 pin M.2 key B+M male >
 - 2 x SATA 6 Gb/s plug pin 8 power with latchtype
 - 1 x 2 pin power connector (power supply for SATA devices)
 - 2 x 3 pin power connector (optional)
- Chipset: Asmedia ASM1061
- Interface: PCIe
- Form factor: M.2 2242
- Suitable for M.2 slot with key M or B based on PCIe
- Data transfer rate up to 6 Gb/s
- Supports HDD and SSD
- Dimensions (LxWxH): ca. 42 x 22 x 11 mm


System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 2.6.38
- One free M.2 key M or key B slot

Package content

- Converter
- Power cable 2 pin to Molex, length ca. 20 cm
- User manual

Images



- 1 x 50 pin M.2 key B + M male
- 2 x SATA 6 Gb/s plug pin 8 power with Molex type
- 1 x 2 pin power connector (power supply for SATA device)
- 2 x 3 pin power connector (power)

General

Form factor:	M.2 2242
Supported operating system:	Linux Kernel 2.6.38 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe

Interface

Connector 1:	1 x 59 pin M.2 key B+M male
Connector 2:	2 x SATA 6 Gb/s plug pin 8 power with latchtype
connector 3:	1 x 2 pin power connector (power supply for SATA devices)
connector 4:	2 x 3 pin power connector (optional)

Technical characteristics

Chipset:	Asmedia ASM1061
Data transfer rate:	6 Gb/s

Physical characteristics

Length:	42 mm
Width:	22 mm
Height:	11 m