

Delock Adapter USB 2.0 Type-A > 1 x Serial DB9 RS-232

Description


This USB Type-A to serial adapter by Delock provides an RS-232 port for meters, POS systems, printers, modems, IoT devices, etc.

LED indicator

Three LEDs indicate at the RS-232 port the current transmission and reception status as well as the USB power supply.

Easy installation

The **integrated driver software** makes the adapter quick and easy to install on the computer.

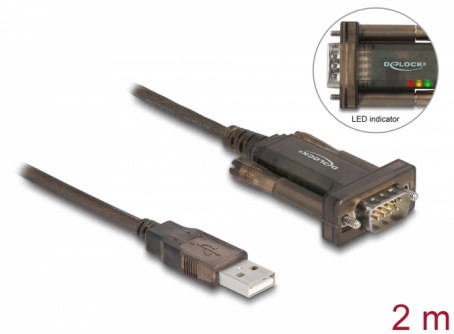

Item no. 64073

EAN: 4043619640737

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 1 x USB 2.0 Type-A male
 - 1 x serial RS-232 DB9 male
- Chipset: Prolific 2503
- Data transfer rate up to 1 Mbps
- Parity: even, odd, none, mark, space
- Stop bit: 1, 1.5, 2
- Data bit: 5, 6, 7, 8
- FIFO: 512 byte
- LED colour: red, yellow, green
- Signals: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- Length incl. connectors (L): ca. 2 m

System requirements


- Chrome OS
- Linux Kernel 3.3 or above

- Mac OS 10.9.5 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC or laptop with a free USB Type-A port

Package content

- USB 2.0 to 1 x serial adapter
- User manual

Images



General

Function:	Plug & Play
Specification:	RS-232 (EIA / TIA)
Supported operating system:	Chrome OS Linux Kernel 3.3 or above Mac OS 10.9.5 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11

Interface

Output:	1 x Serial RS-232 DB9 male
Input:	1 x USB 2.0 Type-A male

Technical characteristics

Chipset:	Prolific PL2503
Data transfer rate:	up to 921.6 Kbps
FIFO:	512 Byte
Data transmission:	asynchronous full duplex
UART:	USB to serial UART

Physical characteristics

Cable length incl. connector:	2 m
Pin finishing:	gold-plated
Screw type:	#4-40 UNC
Shielding:	double



Colour:

transparent

