


Converter M.2 Key B+M male to 1 x Mini PCIe Slot half size / full size with flexible cable

Description

This converter by Delock changes the **M.2 key B or key M interface** into a **Mini PCIe interface**. Different **Mini PCIe modules with USB and PCIe** signals can be inserted in the converter. On the M.2 key B or key M interface can be used e.g. WLAN, Bluetooth, GNSS, 4G, 5G, HSPA and NFC modules. Further it is possible to use **both functions** of a module which has e.g. WLAN and Bluetooth.

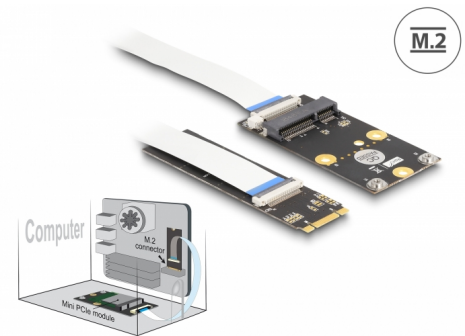

Item no. 64221

EAN: 4043619642212

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - 1 x M.2 key B+M male
 - 1 x Mini PCIe slot
 - 1 x 2 pin pin header male for USB connection
- PCI Express Rev. 2.0
- Interface: PCIe + USB
- Form factor M.2: 2280
- Form factor Mini PCIe: half size and full size
- Suitable for M.2 slot with key M or B based on PCIe
- Dimensions (LxWxH):
 - M.2 board: ca. 80 x 22 x 3 mm
 - Mini PCIe board: ca. 66 x 32 x 5 mm


System requirements

- A free M.2 key B or key M slot

Package content

- Converter board M.2
- Mini PCIe board
- 3 x flat cable, length ca.: 1 x 10 cm, 1 x 20 cm, 1 x 30 cm
- Cable 2 pin to USB 2.0 pin header female, length ca. 40 cm
- Cable 2 pin to open ends, length ca. 40 cm
- Mini PCIe Extension
- Screws
- Screwdriver
- User manual

Images

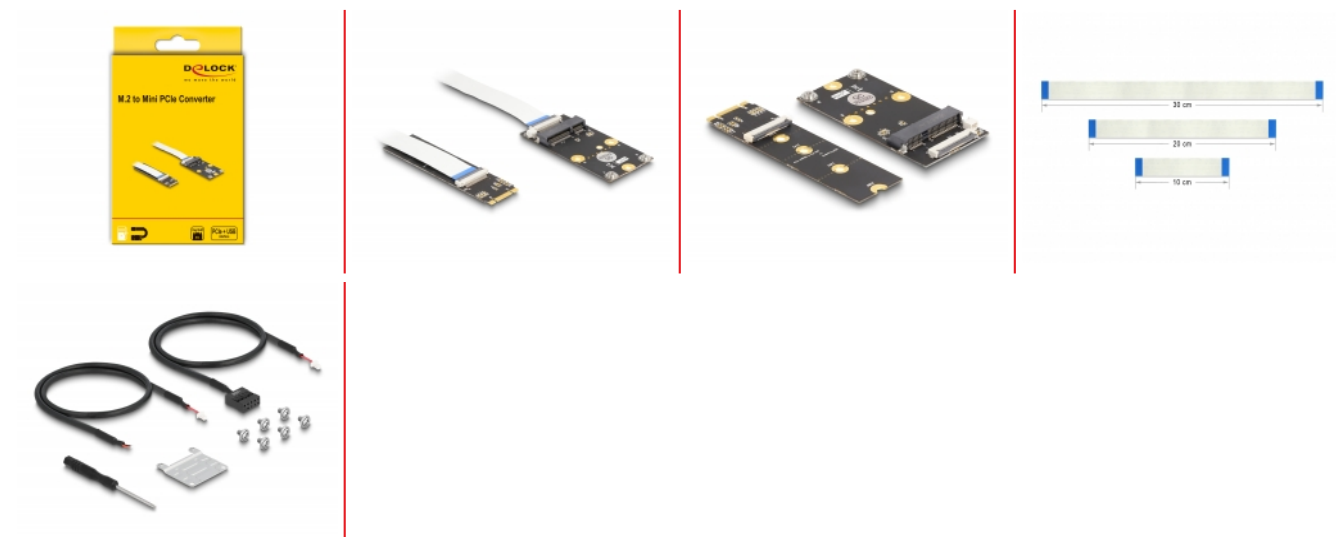

General

Form factor:	M.2 2280
Slot:	PCIe USB

Interface

Connector 1:	1 x M.2 key B+M male
Connector 2:	1 x Mini PCIe slot
connector 3:	1 x 2 pin pin header male for USB connection