


Delock SMA jack panel-mount 2 prepunched holes for mounting

Description

This jack by Delock is suitable for connecting components of radio frequency technology.

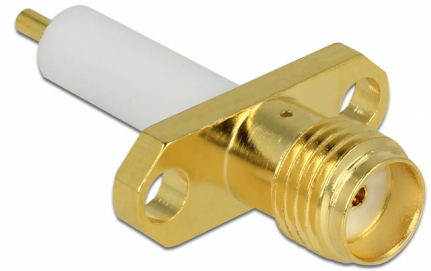

Item no. 65846

EAN: 4043619658466

Country of origin: China

Package: Zip poly bag

Specification

- Connector: 1 x SMA jack
- Impedance: 50 Ohm
- VSWR: 1.5
- Housing: brass gold plated
- Operating temperature: -65 °C ~ 165 °C
- Thread type: M2.6
- Dimensions (LxWxH): ca. 25.2 x 16.0 x 5.7 mm

System requirements

- Device with a free SMA connector

Package content

- SMA Jack

Interface

connector:	1 x SMA jack
------------	--------------

Technical characteristics

Impedance:	50 Ω
Operating temperature:	-65 °C ~ 165 °C
VSWR:	1.5

Physical characteristics

Housing material:	brass gold plated
Length:	25.2 mm
Width:	16.0 mm
Height:	5.7 mm
Thread type:	1/4" - 36 UNS - 2A