


# Delock SMA Jack 90° PCB Thread length 5 mm

## Description

This jack by Delock is suitable for soldering on circuit boards. The gold coating prevents corrosion and ensures an optimal connection.

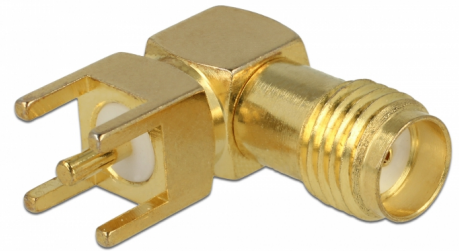

**Item no. 65849**

EAN: 4043619658497

Country of origin: China

Package: Zip poly bag

## Specification

- Connector: 1 x SMA Jack 90°
- Pin: brass gold plated
- Insulator: PTFE
- Housing: brass gold plated
- Frequency range: 0 - 6 GHz
- Impedance: 50 Ohm
- VSWR: 1.2
- Thread type: 1/4" - 36 UNS - 2A
- Thread length: 5 mm
- Operating temperature: -55 °C ~ 165 °C
- Withstand Voltage: 500V / 50Hz
- Soldering: 5 solder joint
- Dimensions (LxHxD): 15.3 x 14.0 x 6.0 mm

## System requirements

- Suitable board for mounting the SMA connector

---

## Package content

- SMA Jack

## General

Mounting type:	Soldering
----------------	-----------

## Interface

connector:	1 x SMA Jack 90°
------------	------------------

## Technical characteristics

Frequency range:	0 - 6 GHz
Impedance:	50 Ω
Operating temperature:	-55 °C ~ 165 °C
VSWR:	1.2

## Physical characteristics

Solder pin:	Ø 1.5 mm
Housing material:	brass gold plated
Diameter:	6.0 mm
Length:	15.3 mm
Height:	14.0 mm
Thread type:	1/4" - 36 UNS - 2A
Insulator:	PTFE