




Delock Terminal block for PCB soldering version 2 pin 9.50 mm pitch vertical 10 pieces

Description

This terminal block by Delock is suitable for the mounting on a PCB. This can be soldered on a board, to create a screw connection. Furthermore, data or power cables can be connected via the terminal block.

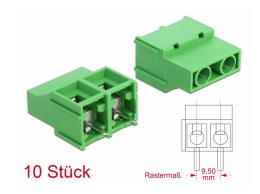

Item no. 66021

EAN: 4043619660216 Country of origin: China Package: Zip poly bag

Specification


- Connectors:
 - 1 x 2 pin terminal block screw terminal
 - 1 x 2 soldering pin
- Pitch: 9.50 mm
- Environmental temperature: -40 °C ~ 105 °C
- Useable for a cable gauge from 26 to 10 AWG
- Withstanding voltage: AC 3000 V / 1 min
- Rated voltage according to: UL: 300 V, IEC: 750 V
- Rated current according to: UL: 30 A, IEC: 41 A
- Insulation resistance: 500 M Ω / DC 1000 V
- · Material: plastic
- Colour: green
- Dimensions (LxWxH): ca. 21.8 x 19.0 x 12.6 mm


Package content

• 10 x Terminal block



Images

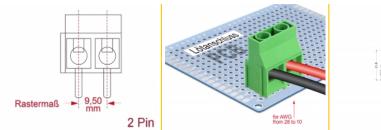





General

Suitable for conductor gauge:	26 - 10 AWG
Mounting type:	Soldering

Interface

Connector 1:	1 x 2 pin terminal block screw terminal
Connector 2:	1 x 2 soldering pin

Technical characteristics

Storage temperature:	-40 °C ~ 105 °C
Resistor:	500 MΩ / DC 1000 V

Physical characteristics

Pitch distance:	9.50 mm
Housing material:	Plastic
Length:	21.8 mm
Width:	19.0 mm
Height:	12.6 mm
Colour:	green