


# Delock RJ50 female to Terminal Block with push-button for DIN rail angled

## Description

This adapter by Delock can be used to connect various control and measuring devices. Strands with stripped ends can be connected via the terminal block toolfree.

### DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

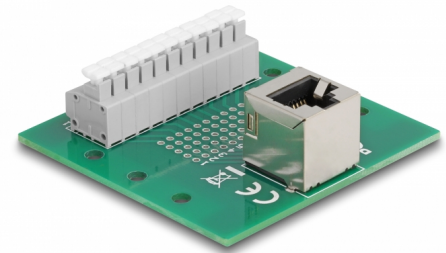

**Item no. 67013**

EAN: 4043619670130

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - 1 x RJ50 female angled
  - 1 x 11 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 60 x 53 x 18 mm



## System requirements

- A free RJ50 plug
- 15 mm or 35 mm DIN rail

## Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws

## Images



## General

Suitable for conductor gauge:	24 - 12 AWG
Mounting type:	DIN rail mounting: 15 mm and 35 mm

## Interface

Connector 1:	1 x RJ50 female angled
Connector 2:	1 x 11 pin terminal block

## Technical characteristics

Operating temperature:	-40 °C ~ 100 °C
------------------------	-----------------

## Physical characteristics

Pitch distance:	3.81 mm
Length:	60 mm
Width:	53 mm
Height:	18 mm