


# Delock Cable DisplayPort 1.2 male > DVI 24+1 male passive 4K 30 Hz 5 m white

## Description

This cable by Delock enables the connection between devices, e.g. a monitor, with DVI connector to a DisplayPort interface.

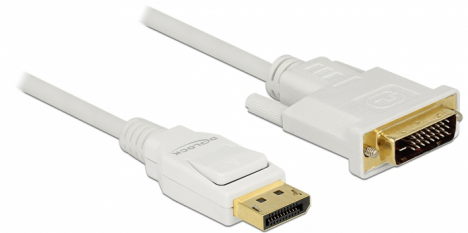

ca. 5 m

**Item no. 83816**

EAN: 4043619838165

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x DisplayPort male >
  - 1 x DVI 24+1 male with screws
- Chipset: Parade PS8402A
- DVI-D (Dual Link), VGA not wired
- DisplayPort 1.2a specification
- Passive cable (level shifter), suitable only for graphics cards with DP++ output
- Signal direction: DisplayPort input > DVI output
- Cable gauge: 30 AWG
- Cable diameter: ca. 6 mm
- Twisted-pair cabling
- Copper conductor
- Contacts gold-plated
- Triple shielded cable
- Data transfer rate up to 10.2 Gb/s
- Resolution up to 3840 x 2160 @ 30 Hz  
(depending on the system and the connected hardware)
- Colour: white
- Length without connectors: ca. 5 m

---

## System requirements

- A free DisplayPort DP++ female

---

## Package content

- DisplayPort to DVI cable

---

## Images



## General

Specification:	DisplayPort 1.2a
----------------	------------------

## Interface

Connector 1:	1 x DisplayPort male
Connector 2:	1 x DVI 24+1 male with screws

## Technical characteristics

Chipset:	Parade PS8402A
Data transfer rate:	10.2 Gb/s
Maximum screen resolution:	3840 x 2160 @ 30 Hz

## Physical characteristics

Connector finishing:	gold-plated
Pin finishing:	gold-plated
Conductor material:	copper
Conductor gauge:	30 AWG
Shielding:	triple
Length:	5 m
Colour:	white