


# Delock Cable SATA 6 Gb/s 7 pin receptacle + 2 pin power female > SATA 22 pin receptacle downwards angled (5 V) metal 20 cm

## Description

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA 7 pin port and a free 2 pin power interface of the motherboard, as available e.g. on the Banana Pi. The metal clips on the SATA receptacles ensure that the cable reliably clicks into place.

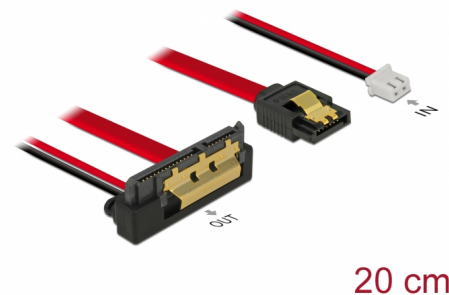

**Item no. 85241**

EAN: 4043619852413

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x SATA 6 Gb/s 7 pin receptacle + 1 x 2 pin power female >
  - 1 x SATA 6 Gb/s 22 pin receptacle downwards angled
- Pitch: 2.50 mm
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Voltage: 5 V
- Cable gauge:
  - 26 AWG data line
  - 20 AWG power line
- Applicable e.g. with Banana Pi
- Length incl. connectors: ca. 20 cm

## System requirements

- A free SATA 7 pin interface

- One free 2 pin power plug


---

## Package content

- SATA cable

---

## Images



## General

Specification:	SATA 6 Gb/s
----------------	-------------

## Interface

Connector 1:	1 x SATA 6 Gb/s 7 pin receptacle
Connector 2:	1 x 2 pin power female
connector 3:	1 x SATA 6 Gb/s 22 pin receptacle

## Technical characteristics

Data transfer rate:	6 Gb/s
Voltage:	5 V

## Physical characteristics

Pitch distance:	2.50 mm
Conductor gauge:	26 AWG data line 20 AWG power line
Length:	20 cm