

Delock PoweredUSB cable male 12 V > 2 x 4 pin male 4 m for POS printers and terminals

Description

This PoweredUSB cable by Delock can be used to connect a device with 2 x 4 pin port to a PC or hub with PoweredUSB 12 V port. It is suitable for connecting various POS devices such as printers and terminals, **e.g. by IBM or other manufacturers**. The cable is used both for data transmission and for power supply of the connected device.



Item no. 85485

EAN: 4043619854851

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x PoweredUSB male 12 V >
 - 1 x Male 2 x 4 pin
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge:
 - 26 AWG data line
 - 20 AWG power line
- Cable diameter: ca. 6.5 mm
- Cable double shielded
- Data transfer rate up to 480 Mbps
- Colour: black
- Length incl. connectors (L): ca. 4 m

System requirements


- PC or hub with a free PoweredUSB 12 V female port

- Device with a free 2 x 4 pin female port

Package content

- PoweredUSB cable

Images

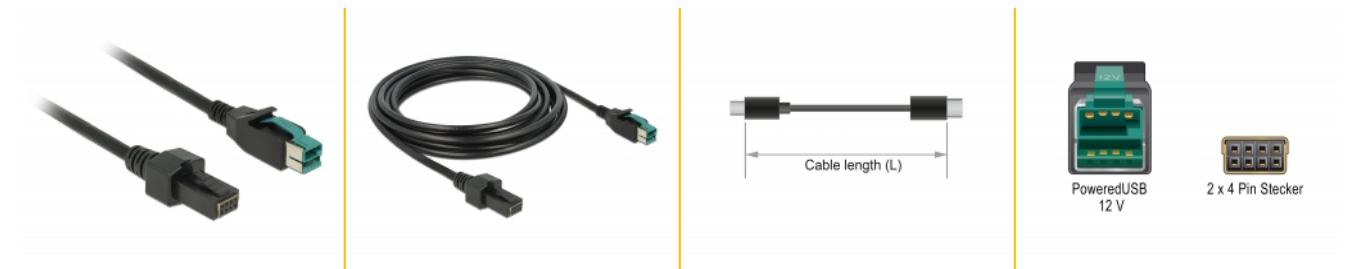

General

Specification:	PoweredUSB
----------------	------------

Interface

Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x male 2 x 4 pin

Technical characteristics

Data transfer rate:	USB 2.0 up to 480 Mb/s
Voltage:	12 V

Physical characteristics

Conductor gauge:	26 AWG data line 20 AWG power line
Shielding:	double
Length:	4 m
Colour:	black