


Delock Antenna Cable N Plug > RP-SMA Plug CFD200 0.5 m Low Loss

Description

Use this antenna cable, to connect components of the radio frequency technology together. The RF cable is characterized by a low attenuation.

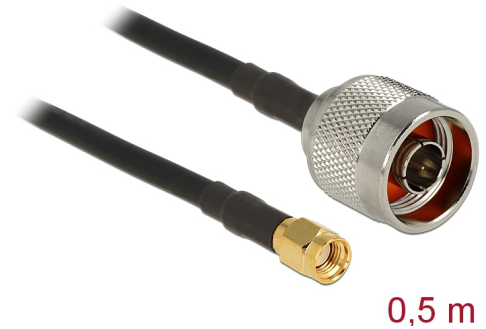

0,5 m

Item no. 88937

EAN: 4043619889372

Country of origin: Taiwan,
Republic of China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x N plug
 - 1 x RP-SMA plug
- Impedance: 50 Ohm
- Cable type: CFD200
- Cable category: coaxial
- Cable attenuation:
 - 0.55 dB @ 2.4 GHz per meter
 - 0.86 dB @ 5.7 GHz per meter
- Cable diameter: 5 mm
- Cable colour: black
- Minimum bending radius: 12.7 mm
- Cable length incl. connectors: ca. 0.5 m

System requirements

- Device with free N jack or RP-SMA jack

Package content

- Antenna extension cable

Images



Interface

| | |
|--------------|-----------------|
| Connector 1: | 1 x N male |
| Connector 2: | 1 x RP-SMA plug |

Technical characteristics

| | |
|------------|-------------|
| Impedance: | 50 Ω |
|------------|-------------|

Physical characteristics

| | |
|-------------------------------|--|
| Cable category: | coaxial |
| Cable type: | CFD200 |
| Cable attenuation: | 0.55 dB @ 2.4 GHz per meter 0.86 dB @ 5.7 GHz per meter |
| Cable colour: | black |
| Cable length incl. connector: | 0.5 m |
| Pin finishing: | gold-plated |
| Smallest bending radius: | 12.7 mm |