


Delock PCI Express x1 Card to 6 x Serial

Description

The Delock PCI Express card expands your PC by six external serial ports. You can connect devices like scanner, printer, mouse etc. to the card.

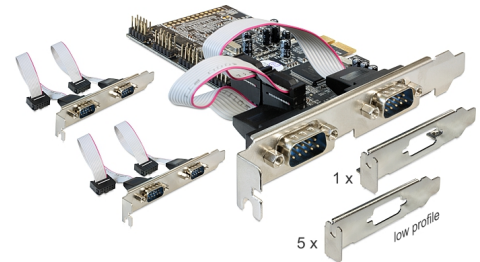

Item no. 89347

EAN: 4043619893478

Country of origin: China

Package: Blister

Specification

- Connector:
external:
2 x serial RS-232 DB9 male
2 x serial RS-232 DB9 male (separate rear bracket)
2 x serial RS-232 DB9 male (separate rear bracket)
internal:
1 x PCI Express x1, V1.1
- Chipset: Moschip
- Data transfer rate up to 230.4 Kb/s
- FIFO: 256 byte
- Compatible with 16C550 UART

System requirements

- Windows Server-2003/Server-2003-64/Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/10/10-64/11, Linux Kernel 2.6
- PC with one free PCI Express slot and two rear slot

Package content

- PCI Express card
- 2 x rear bracket
- 6 x low profile bracket
- Driver CD
- User manual

Images



General

Form factor:	Low Profile
Specification:	RS-232 (EIA / TIA) PCIe 1.1
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2003 32-bit Windows Server 2003 64-bit Windows Vista 32-bit Windows Vista 64-bit
Slot:	PCIe

Interface

External:	6 x Serial RS-232 DB9 Plug
Internal:	1 x PCI Express x1, V1.1

Technical characteristics

Chipset:	ASIX MCS9922 ASIX MCS9901
Data transfer rate:	6 x up to 230,4 Kbps
FIFO:	6 x 256 Byte
UART:	16C450 / 16C550 / 16C650

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------



Colour:

black

