


# Delock PCI Express Card > 3 x M.2 Slot - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by three M.2 slots. On the card can be connected up to two M.2 SATA modules in format 2280, 2260, 2242, 2230 and one M.2 PCIe module in format 2280, 2260, 2242, 2230. The SATA modules will be connected via SATA cables to the motherboard.

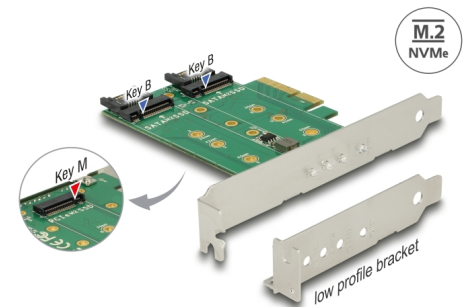

### Item no. 89518

EAN: 4043619895182

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Special features

- Supports modules with SATA and PCIe interface

## Specification

- Connectors:  
internal:  
2 x 67 pin M.2 key B slot  
1 x 67 pin M.2 key M slot  
1 x PCI Express x4, V3.0  
2 x SATA 7 pin plug
- Interface: SATA + PCIe
- Supports two M.2 modules in format: 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format: 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)

- 4 x LED indicator
- Power supply via PCI Express

## System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- A free SATA 7 pin interface for each connected M.2 module based on SATA

## Package content

- PCI Express card
- Low profile bracket
- 3 x fixing screw
- Screwdriver
- User manual

## Images



## General

Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported

## Interface

Internal:	2 x 67 pin M.2 key B slot 1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0 2 x SATA 22 pin plug
-----------	--

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------