


Delock PCI Express x4 Card > 1 x external USB Type-C™ female + 1 x external USB 3.1 Gen 2 Type-A female

Description

This PCI Express card by Delock expands the PC by two external USB 3.1 ports. Different USB devices, such as docking stations, card readers, external housings etc., can be connected to the card.

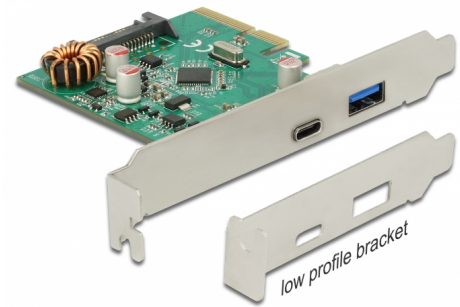

Item no. 89562

EAN: 4043619895625

Country of origin: China

Package: Retail Box

Specification

- Connector:
 - external:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female
 - internal:
 - 1 x SATA 15 pin power connector
 - 1 x PCI Express x4, V2.0
- Chipset: Asmedia ASM1142
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power:
 - USB Type-C™: max. 15 watt (5 V / 3 A)
 - USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Supports eXtensible Host Controller Interface (xHCI) specifications 1.1

- Supports UASP

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- Driver CD
- User manual

Images



General

Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

Interface

External:	1 x USB 10 Gbps USB Type-C™ female 1 x USB 10 Gbps Type-A female
Internal:	1 x PCI Express x4, V2.0 1 x SATA 15 pin plug

Technical characteristics

Chipset:	Asmedia ASM1142
Data transfer rate:	USB 10 Gbps up to 10 Gb/s