


# Delock PoweredUSB PCI Express x1 Card > 1 x 24 V + 2 x 12 V

## Description

The PCI Express card by Delock expands a PC by three external PoweredUSB 2.0 ports. Different USB devices such as docking stations, card reader, external enclosure etc. can be connected. Furthermore, with the help of appropriate cables, devices which require a power supply of 12 V or 24 V, e.g. barcode scanner or POS systems, can be connected and need no additional power supply.

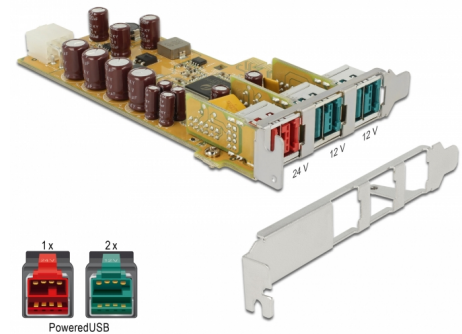

**Item no. 89655**

EAN: 4043619896554

Country of origin: China

Package: Box

## Specification

- Connectors:
  - external:
    - 1 x PoweredUSB 2.0 Type-A female 24 V
    - 2 x PoweredUSB 2.0 Type-A female 12 V
  - internal:
    - 1 x PCI Express x1, V1.1
    - 1 x 6 pin power connector
- Chipset: Pericom PI7C9X
- Output current max. 3 A per PoweredUSB port and 0.5 A per USB 2.0 port
- Data transfer rate up to:
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Over-current protection for each port
- Compliant with OHCI and EHCI
- ESD protection up to 15 kV

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 2.6.x / Kernel 4.9.4
- PC with one free PCI Express slot
- Power supply with one free 6 pin power connector



---

## Package content

- PCI Express card PoweredUSB
- Low profile bracket

---

## Images



## General

Specification:	PoweredUSB
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

External:	1 x PoweredUSB 2.0 Type-A female 24 V 2 x PoweredUSB 2.0 Type-A female 12 V
Internal:	1 x 6 pin power connector 1 x PCI Express x1, V1.1

## Technical characteristics

Chipset:	Pericom PI7C9X
Data transfer rate:	480 Mbps
Maximum current:	3 A

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------