


# Delock PoweredUSB PCI Express x1 Card > 3 x 12 V

## Description

The PCI Express card by Delock expands a PC by three external powered USB 2.0 ports. Different USB devices such as docking stations, card reader, external enclosure etc. can be connected. Furthermore, with the help of appropriate cables, devices which require a power supply of 12 V, e.g. barcode scanner or POS systems, can be connected and need no additional power supply.

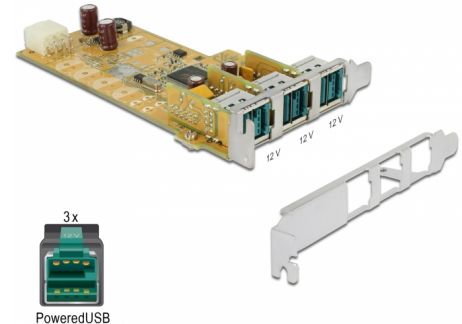

**Item no. 89656**

EAN: 4043619896561

Country of origin: China

Package: Box

## Specification

- Connectors:  
external:  
3 x PoweredUSB 2.0 Type-A female 12 V  
internal:  
1 x PCI Express x1, V1.1  
1 x 6 pin power connector
- Chipset: Pericom PI7C9X
- Output current max. 3 A per PoweredUSB port and 0.5 A per USB 2.0 port
- Data transfer rate up to:  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Over-current protection for each port
- Compliant with OHCI and EHCI
- ESD protection up to 15 kV

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 2.6.x / Kernel 4.9.4

- PC with one free PCI Express slot
- Power supply with one free 6 pin power connector

---

## Package content

- PCI Express card PoweredUSB
- Low profile bracket

---

## Images



## General

|                             |   |
|-----------------------------|---|
| Specification:              | PoweredUSB  |
| Supported operating system: | Linux Kernel 2.6 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |

## Interface

|           |   |
|-----------|---|
| External: | 3 x PoweredUSB 2.0 Type-A female 12 V                 |
| Internal: | 1 x 6 pin power connector<br>1 x PCI Express x1, V1.1 |

## Technical characteristics

|                     |                |
|---------------------|----------------|
| Chipset:            | Pericom PI7C9X |
| Data transfer rate: | 480 Mbps       |
| Maximum current:    | 3 A            |

## Physical characteristics

|               |                         |
|---------------|-------------------------|
| Slot bracket: | Low Profile<br>standard |
|---------------|-------------------------|