

Delock PCI Express x16 Card to 5 x internal M.2 Key B / SATA

Description


This PCI Express card by Delock expands the PC by five M.2 slots. Up to five **M.2 SATA** modules can be connected in **format 2280, 2260, 2242, 2230** with this card.

SATA devices

Furthermore it is possible to connect up to five SATA devices to the card. Therefor the scope of delivery includes adapters and SATA cables. A combination of SATA devices and M.2 SSDs is also possible.

Low Profile Form Factor

By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

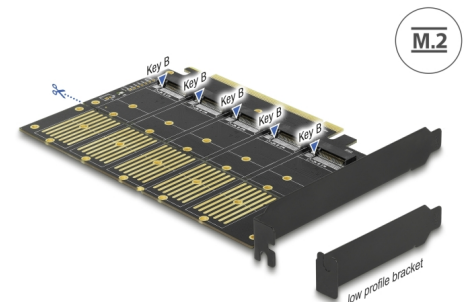

Item no. 90435

EAN: 4043619904358

Country of origin: China

Package: Retail Box

Specification

- Connectors:
internal:
5 x 67 pin M.2 key B slot
1 x PCI Express x16, V3.0
- Chipset: JMicron JMB585
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- 6 x LED indicator
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable




System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 5 x M.2 to SATA adapter
- 5 x SATA cable, length ca. 50 cm
- Screwdriver
- Mounting material
- User manual

Images



General

Function:	bootable
Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	6 x
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	5 x SATA 6 Gb/s 7 pin plug 1 x PCI Express x16, V3.0 5 x 67 pin M.2 key B slot
-----------	--------------------------------------------------------------------------------------

Technical characteristics

Chipset:	JMicron JMB585
----------	----------------