



Product Name	Micro SATA 16 pin(7P+9P) to 7pin +Power cable
Product Numbers	

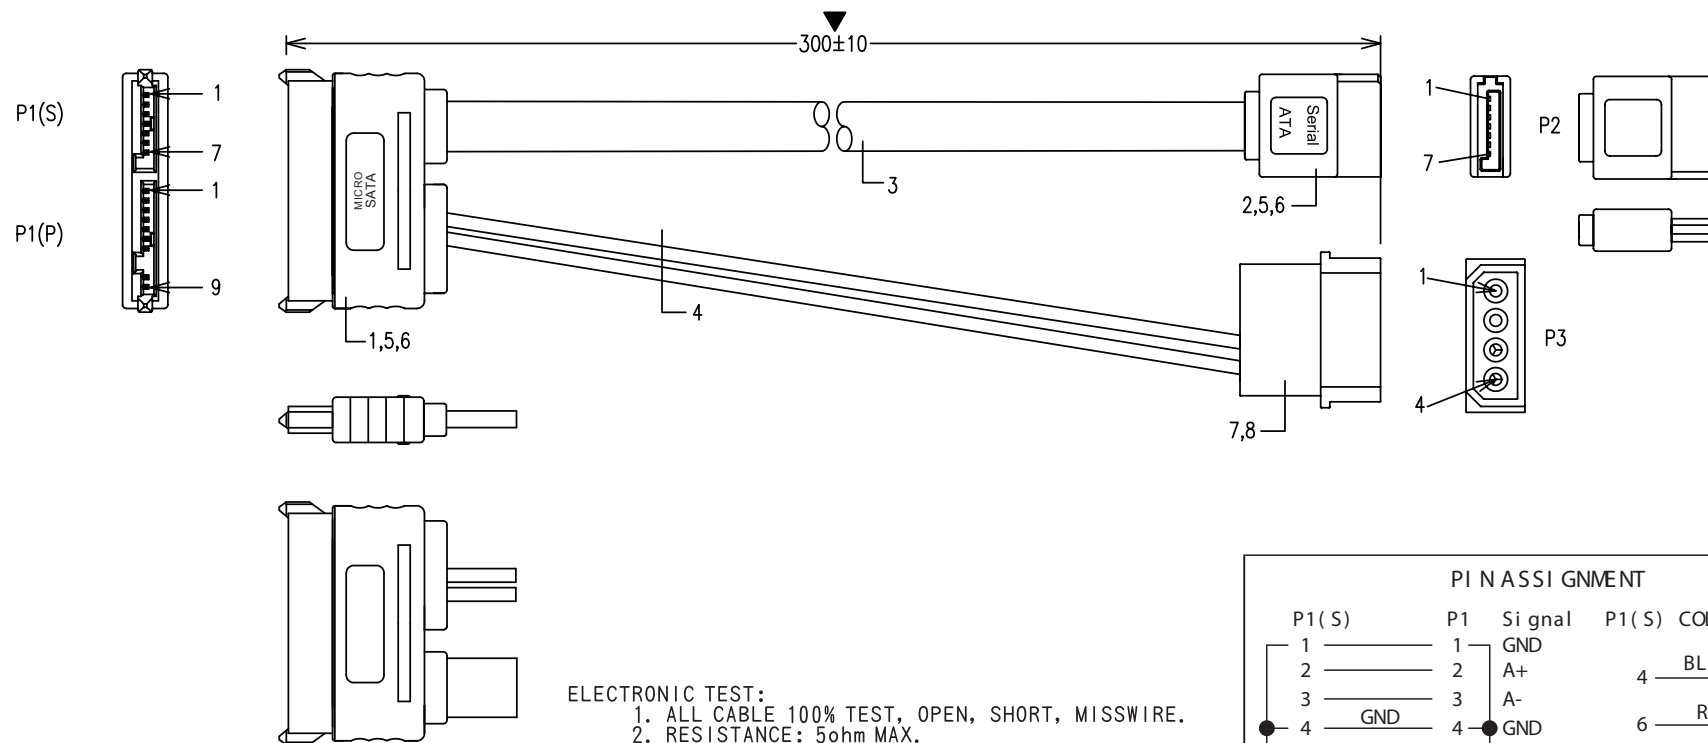

ELECTRONIC TEST:  
1. ALL CABLE 100% TEST, OPEN, SHORT, MISSWIRE.  
2. RESISTANCE: 5ohm MAX.  
3. I. RESISTANCE: 10ohm MIN.  
4. HI-POT: 300V DC/10MS.  
5. DIMENSIONS MARL "▼" SHOULD BE CHECKED;

PIN ASSIGNMENT					
P1 (S)	P1	Signal	P1 (S) COLOR	P3	
1	1	GND		3	GND
2	2	A+	4 BLACK		
3	3	A-			
4	4	GND	6 RED	4	5V
5	5	B-			
6	6	B+			
7	7	GND			

8	TERMINAL	SM, CONTACT: BRASS, TIN PLATED, MALE	2	PCS
7	HOUSING	SM, POWER-4P FEMALE, WHITE	1	PCS
6	OVERMOLD	45P PVC BLACK	0.0084	KG
5	INNERMOLD	LD PE	0.0023	KG
4	HOOK UP WIRE	UL1007 22AWG BLACK&RED L=300MM	2	PCS
3	SATA CABLE	Sata7p Cable 26AWG COLOR:RED OD:2.2*7.8MM	300	MM
2	SATA CONN	S-ATA 7P 7C BLACK MOLDING G/F	1	PCS
1	SATA CONN	SATA 16P, BLACK MOLDING G/F	1	PCS
NO.	MATERIAL	DESCRIPTION	Q'TY	UNIT

 we move the world	
Item no.	84384
Barcode: 4043619843848	
File:	88040