



REV	ECRN	DATE
1	NEW PRODUCTION	20180630

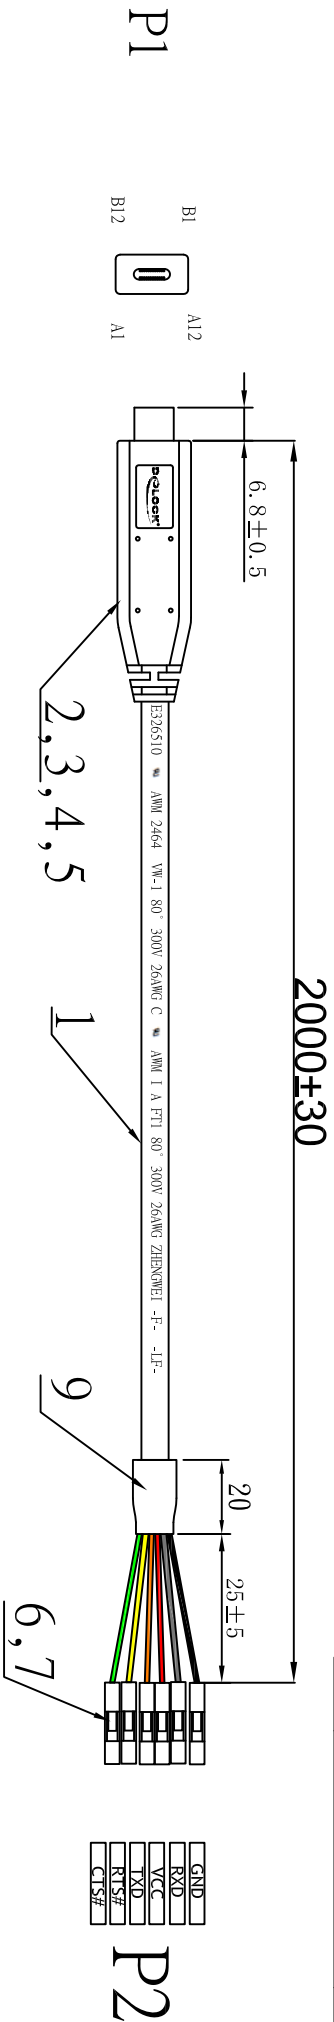

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
 2. CONTACT RESISTANCE: 0.5ohm,
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.



- Packaging requirements
1. For each 1PCS of wire binding according to the size of wire binding
 2. PE bag & label packaging for customers:
 2. Each case must be equipped with 1PCS large waterproof bag:
 3. The weight of each box must be within 10KG:
 4. The actual number of containers shall prevail:
 5. The quantity of each batch of containers shall be the same.

PIN WIRING

P1	P2
1 RED(5V)	3(VCC)
2 ORANGE	4(TXD)
3 YELLOW	5(RXD)
4 GREEN	6(RTS#)
5 BLACK	1(GND)
6 BROWN	2(CTS#)

NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT
⑩	1.180150.0301R	PE BAG	180*150*0.04MM PE袋 PRINTED BLACK FONT"	1	PCS
⑨	F.0501B0.0100R	TUBE	φ5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑧	I.000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑦	E.00254M.0600R	HOUSING	Dupont 2.54mm 1*1P HOUSING	6	PCS
⑥	D.00254F.1400R	TERMINAL	Dupont 2.54mm TERMINAL	6	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	5.5	G
④	C.000000.0000R	MOLDING	PE	2.5	G
③	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N05R	CONNECTOR	TTL-RS232-PCB(3.3V) TYPE C/M CONNECTOR PLASTIC:BLACK	1	PCS
①	A.009X01.0603R	CABLE	UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE,GREEN, BLACK, YELLOW, BROWN)+AL FOIL PVC JACKET COLOR:BLACK OD=5.0±0.1mm L=2000MM	1	PCS

DLOCK we move the world		
Title: Converter USB Type-C™ 2.0 male to LVTTL 6 pin pin header female separate 2.0 m		
Date	2018 / 07 / 03	
Unit	mm	
Projection		
Rev	A	
Item no.		63946
Barcode		4043619639465
File No.		88203