


Delock M12 Connector A-coded 4 pin male for mounting with screw connection 90° angled metal

Description

This connector by Delock can be used to connect a cable via a screw terminal connection with an M12 connector, e.g. for machine control or automation.

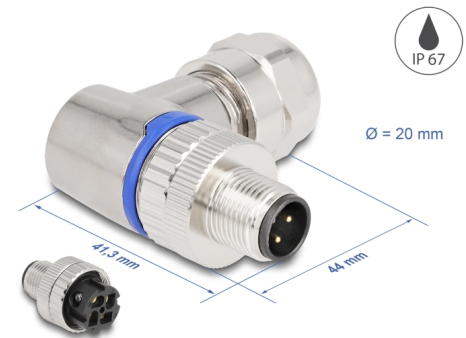

Item no. 60540

EAN: 4043619605408

Country of origin: China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x M12 male A-coded 4 pin
 - 4 x screw terminal
- Housing material: metal
- Useable for a cable gauge range from 26 to 20 AWG (0.13 - 0.52 mm²)
- Operating voltage: max. 250 V
- Current: max. 4 A
- Operating temperature: -25 °C ~ 85 °C
- Protection class: IP67
- Cable entry max. 3.0 - 8 mm
- Thread size: M12 x 1.0 mm
- Colour: black
- Dimensions (LxWxD): ca. 44,0 x 41,3 x 20,0 mm

System requirements

- A free M12 female port

Package content

- Connector
-

Images



Interface

| | |
|--------------|--------------|
| Connector 1: | 1 x M12 plug |
|--------------|--------------|

Technical characteristics

| | |
|------------------------|----------------|
| Operating voltage: | 250 V |
| Operating temperature: | -25 °C ~ 85 °C |
| Current consumption: | 4 A |

Physical characteristics

| | |
|-------------------|-------------|
| Housing material: | metal |
| Pin finishing: | gold-plated |
| Diameter: | 20 mm |
| Length: | 44 mm |
| Width: | 41.3 mm |
| Colour: | silver |