


# Delock PCI Card to 2 x Serial RS-232 + 1 x Parallel IEEE1284

## Description

The PCI card by Delock expands a PC by two external serial ports as well as one external parallel port. Different devices such as scanner, printer, mouse etc. can be connected to this card.

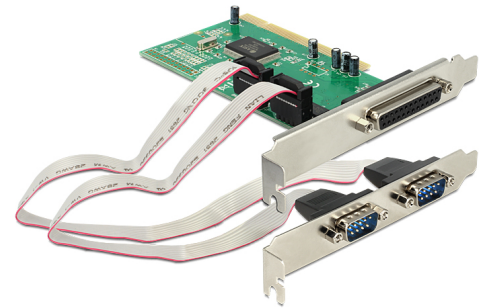

**Item no. 89004**

EAN: 4043619890040

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - external:
    - 2 x serial RS-232 DB9 male (separate rear bracket)
    - 1 x Parallel DB25 female
  - internal:
    - 2 x 9 pin COM port pin header male
    - 1 x 32-Bit PCI standard 2.1
- Chipset: ASIX MCS9835
- Data transfer rate:
  - serial up to 115.2 Kbps
  - parallel up to 1.5 Mbps
- FIFO: 16 byte
- Automatically selects IRQ and I/O
- SPP, PS2, EPP, ECP compatible to IEEE 1284
- Compatible with 16C550 UART
- Supports PCI IQR sharing
- Operating temperature: 0 °C ~ 70 °C
- Dimensions (LxW): ca. 119.9 x 63.5 mm

---

## System requirements

- Linux Kernel 2.6
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI slot and one rear slot

---

## Package content

- PCI card
- Slot bracket
- Driver CD
- User manual

---

## Images

