

# Delock Serial Barcode scanner 2D fixed mount - Image scanner

## Description

This wired serial barcode scanner by Delock can be connected to a device with a free RS-232 interface. With this Image scanner with CMOS image sensor, all common 1D and 2D barcode types can be detected without using any scan button. Furthermore, this fixed mount barcode scanner is able to read barcodes shown on displays and monitors.

Even in a completely dark environment, the scanner turns on automatically, when an object appears in its scanning area. There is an additional red LED on top of the scanner indicating the readiness of the scanner for operation and a green LED confirming a positive scan.

Depending on your specific requirement, various visual and acoustic signals can be configured and the scan process also be triggered by the appropriate software.

The resistant housing protects the scanner from external mechanical influences and prevents the limited ingress of dust and low pressure water jets. With the included mounting brackets, the scanner can be installed variable in different alignments.



**Item no. 90287**

EAN: 4043619902873

Country of origin: Taiwan,  
Republic of China

Package: White Box

## Specification

- Connectors:
  - 1 x Serial RS-232 DB9 female with screws
  - 1 x 5 V DC jack
- Resolution:
  - Code 39: 0.127 mm
  - QR Code: 0.169 mm
- Trigger: automatic, software
- Reading distance: ca. 45 mm bis 285 mm
- Light source: LED, 625 nm
- Light colour: visible LED red
- Aimer: Laser Class 1, 650 nm, red
- Sensor: CMOS image sensor
- Scan rate: up to 60 frames per second

- Scan angle:  
horizontal: 36°  
vertical: 23°
- Surrounding brightness: max. 30000 Lux
- Input voltage: 5 V
- Power supply via pin 9 on the RS-232 port or via DC jack
- Current consumption:  
operation: max. 320 mA  
standby: max. 100 mA
- Operating temperature: -10 °C ~ 55 °C
- Storage temperature: -20 °C ~ 65 °C
- Relative humidity: 0 - 95 % (non condensing)
- Protection class: IP55
- Colour: black
- Weight:  
Barcode scanner: ca. 85 g  
Mounting brackets: ca. 15 g
- Dimensions (LxWxH): ca. 56 x 41 x 20 mm
- Cable length: ca. 85.9 cm
- Software:  
EzUtility Software (standard mode/automatic Trigger)  
BEO Software (command mode/software Trigger)
- Scancodes:  
1D Codes:  
UPC-A / UPC-E  
EAN-8 / EAN-13  
Matrix 2 of 5  
China Postal Code (Toshiba Code)  
Industrial 2 of 5  
Interleaved 2 of 5  
Codabar  
Code 11  
Code 32  
Standard Code 39  
Full ASCII Code 39  
Code 93  
Code 128  
EAN / UCC 128  
MSI Plessey Code  
UK Plessey Code  
Telepen Code  
GS1 Databar  
IATA Code

2D Codes:  
PDF417  
DataMatrix  
QR Code  
Micro QR Code  
Chinese Sensible Code

---

## Specification of power connector

- Ground outside, plus inside
- Dimensions:  
inside:  $\varnothing$  ca. 2.1 mm  
outside:  $\varnothing$  ca. 5.5 mm  
length: ca. 12.5 mm

---

## System requirements

- Windows 7/7-32/8.1/8.1-64/10/10-64
- Device with RS-232 interface


---

## Package content

- Barcode scanner
- 1 x mounting bracket 90°
- 1 x mounting bracket 60°
- 2 x screw
- User manual
- Gender Changer

---

## Images

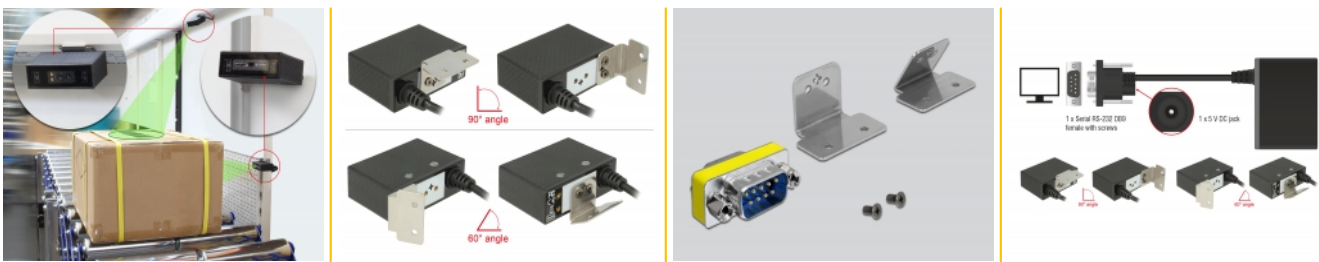

## Interface

connector:	1 x serial RS-232 DB9 female with screws
------------	--

## Technical characteristics

Operating voltage:	5 V
Operating temperature:	-10 °C ~ 55 °C
Current consumption:	operation: 320 mA standby: 100 mA
Resolution:	0,127 mm 0,169 mm
Scan rate:	60 pictures per second
Trigger:	automatic software
Reading distance:	45 mm - 285 mm
Light source:	LED, 625 nm
Sensor:	CMOS Bildsensor

Scancodes:	UPC-A UPC-E EAN-8 EAN-13 Matrix 2 of 5 China Postal Code (Toshiba Code) Industrial 2 of 5 Interleaved 2 of 5 Codabar Code 11 Code 32 Standard Code 39 Full ASCII Code 39 Code 93 Code 128 MSI Plessey Code UK Plessey Code Telepen Code GS1 Databar IATA Code EAN / UCC 128 PDF417 DataMatrix QR Code Micro QR Code Chinese Sensible Code
Surrounding brightness:	30000 Lux

## Physical characteristics

Weight:	85 g
Cable length incl. connector:	86 cm
Length:	56 mm
Width:	41 mm
Height:	20 mm
Colour:	black